



## **TEST REPORT**

Reference No	:	WTF24X04094072Y
Applicant	<u>+</u>	Mid Ocean Brands B.V.
Address	: : : : : :	7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Manufacturer	in.	110075
Address	S. T. E. B.	Tours until me in an an are
Product Name	4	Foldable ANC headphone
Model No	έ,	MO2275
Test specification	wh wif with	EN 50332-2:2013: Sound system equipment: Headphones and earphones associated with personal music players - Maximum sound pressure level measurement methodology Part 2: Matching of sets with headphones if either or both are offered separately, or are offered as one package equipment but with standardized connectors between the two allowing to combine components of different manufacturers or different design
Date of Receipt sample		2024-05-13
Date of Test	÷	2024-05-13 to 2024-05-13
Date of Issue	الۍ :	2024-05-15
Test Report Form No	•	WTX_EN50332_2_2013A
Test Result	? <u>,</u>	Pass THE LIFE OF MILE WILL WILL WILL WILL WILL WILL WILL W
reproduced, except in full, with	nout	rt refer only to the sample(s) tested, this test report cannot be prior written permission of the company. The report would be invalid ute and the signatures of approver.
Address: 1/F., Ro	om 1	Prepared By: tek Testing Group (Shenzhen) Co., Ltd. 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, Guangdong, China
Tel :+86-755-3366	6330	8 Fax:+86-755-33663309 Email: <u>sem@waltek.com.cn</u>
Tested by:		Approved by:
Ivan Mang		Anthous

Ivan Zhang

Harvid Wei



V VULLERY

Test item description	······ Bluetooth Headphone
Trademark	
Model and/or type reference	····: MO2275
Rating(s)	·····: DC5V/ 0.5A
Test Laboratory	Waltek Testing Group (Shenzhen) Co., Ltd.
Address	1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd
	Road, Block 70 Bao'an District, Shenzhen, Guangdong, China
Conoral product information:	

General product information:

The sample(s) tested complies with the requirements of EN 50332-2: 2013.

#### **Model Differences:**

N/A

### Summary of testing:

All tests had been assessed for safety with respect to the above test specifications and found to comply with the requirements of the standards.



Test case verdicts						
Test case does not apply to the test ob	pject : N(N/A)					
Test item does meet the requirement: P(Pass)						
Test item does not meet the requirement: F(Fail)						
Degree of protection against moisture.	: IPX0					
General remarks	THE THE THE THE NATIONAL					
The test result presented in this report	relate only to the object(s) tested.					
This report shall not be reproduced, ex laboratory.	scept in full, without the written approval of the Issuing testing					
The report would be invalid without spe The report would be invalid without the "(see Enclosure #)" refers to additional "(see appended table)" refers to a table	l information appended to the report.					
Remark:	A AR ARE THE STIR MITE MITE WATER					
Whether parts of tests for the product I ☐ Yes	have been subcontracted to other labs: ⊠ No					
If Yes, list the related test items and la Test items:	b information: white white white white white					



	the At EN	50332-2: 2013	70, 70,
Clause	Requirement – Test	Result - Remark	Verdict

4	Basic conditions for specifications and measurements (For basic conditions on measurements of the maximum sound pressure level, reference is made to EN 50332-1.)	
4.1	General description	Р
UNL UNL	The sound pressure level produced by headphones or earphones can be measured by subjective methods or by objective methods.	P
ynliek «	The reference method for evaluating the sound pressured level emitted by earphones is a psycho acoustic method known as "equal loudness" (EN60268-7)	H MILL P W
4.2	Measuring principle	N LI Puri
'A MUTT	The standard is based on the use of a Head and Torso Simulator (HATS) in accordance with IEC 60318-7	niet prie
WALTER NITER	The sound pressure level measured by the ear simulator microphone represents the pressure found at eardrum level and differs from that of the free field pressure by the HATS transfer function	TE WALTE

5	Player characteristics and methods of measurement	N N
5.1	Maximum output voltage Vm	- John John Nicol
5.2	Method of measurement and conditions	N
5.2.1	Input signal	miter with while
LIEK W	Actual musical signals are continuously fluctuating in both amplitude and spectral contents and thus cannot be used as test signals	STEP WITH WITH NOW
ek wair wair	The test signal must therefore be a stationary wide-band signal, the spectral content of which is representative of the musical signals.	A WILLER AND EN WILL
MULLER OF	The test signal used to determine the maximum sound pressure level of headphones shall be programme simulation noise, as defined in HD 483.1 S2.	MITEL WILLEY WAT N
5.2.2	Operating conditions	SEL STEE SEL N. N.
L 3	- By a established power supply	N
WILL	- tolerance of nominal supply voltage	anti uni uN
WALTER.	- All controls are adjusted to maximum sound pressure level	MITEL MITEL IN Nº

Waltek Testing Group (Shenzhen) Co., Ltd. http://www.waltek.com.cn



EN 50332-2: 2013				
Clause	Requirement – Test	Result - Remark	Verdict	
et	- load of player output	All the tit	N-	
5.2.3	Method of measurement for analogue audio outputs	MULTE MULTE MULT	MULT MULT	
NIT WA	The measuring equipment shall conform to: - EN 61672-1, class 1 for (sound level meters); - EN61260, class 1 for (1/3 octave analysers).	UNLIER WHITE WHITE W	N	
WALTER.	The maximum output voltage Vm shall be defined as unweithted r.m.s. voltage at the load, using an averaging time of 30 s or more.	A STEE WITER WITER	- N	
5.2.4	Method of measurement for digital audio outputs	A A A	A N	
riek <sup>Me</sup> ri	The maximum output level Lm shall be defined as average of digital signal, using an averaging time of 30 s or more.	White white white	LIET WILLEY WALL	
EX NUTER	The digital input test signal is defined in EN 50332-1 as -10 dBFS.	et it with out	et Net Net	

6	Headphone/Earphone characteristics and methods of measurement	ent WP
6.1	Measuring equipment	
iek mi	The measuring equipment shall be in accordance with EN 61672-1when connected with a HATS microphone.	AND THE PUT
6.2	Simulated programme signal characteristic voltage	MILIER MILIER MPIER
6.3	Method of measurement arrangement and conditions	NLIER MILER WILL P
6.3.1	Input signal	P
er v	- is program simulation noise as defined in HD 483.1 S2	P
- Mr.	- according part 1, subclause 5.1	and an P
6.3.2	Source impedance of analogue input devices	Jet Je P
10.	- output impedance of the test signal source	Р
6.3.3	Acoustical measurement method	JE WELL WE BY
6.3.4	Headphones / earphones fit	of Alt Alt P
* 10°	- Position correctly for measuring maximum sound pressure	P P
me	- the manufacturer's instruction for correct use	The Ale
6.3.5	Measure of evaluation	P



EN 50332-2: 2013				
Clause	Requirement – Test	Result - Remark	Verdict	
, et	- part 1, subclause 6.4	The American	Р	
ance a	- sound pressure level reaches 94 dB SPL	LIE MITER MILIE WALLE	Mur Mur B A	

# MALLETER



TO THE IN

Table 2 - Classification of the characteristics to be specified

Subclause	Characteristics	Products	
5.1	Maximum output voltage	Player	
6.1	Wide band characteristic voltage	Headphones	

### Measuring result:

5.1	Measuring result	NICE MEN	
- Int	SPL (dB)	Vmax (mV)	Criterion request(mV)
Left side	A - At let	OLIER WHITE WHITE WHITE W	very aug -aug.
Right side	WILL MULL MULL AND AND	The state of	CEL LIER TUE

6.3.5	Measuring result	(SPL) (Part 1, 6.4	l) (Bluetooth mode	)	. ₽ √
Aller A	Measurement No.1	Measurement No.2	Measurement No.3	Measurement No.4	Measurement No.5
Left side	92.32	92.32	92.39	92.38	92.39
Right side	92.64	92.65	92.70	92.69	92.72
Average	Left side: 92.36	A C	Right side: 92.68	a July a	in the t

6.3.5	Measuring result (SPL) (Part 1, 6.4) (AUX mode)				During Punit
JEF J	Measurement No.1	Measurement No.2	Measurement No.3	Measurement No.4	Measurement No.5
Left side	96.35	96.36	96.39	96.35	96.39
Right side	97.35	97.36	97.39	97.35	97.39
Average	Left side:96.36	ER WALLES WALL	Right side:97.36		ct ct a

5.3.5	Measuring result (WBCV)			
	SPL (dB)	Vwbcv (mV)	Criterion request(mV)	
Left side	94	281.8	≥75	
Right side	94	281.8	≥75	



### **Photo Documentation**

Model: MO2275



Photo 1



Photo 2





Photo 3



Photo 4





Photo 5



Photo 6

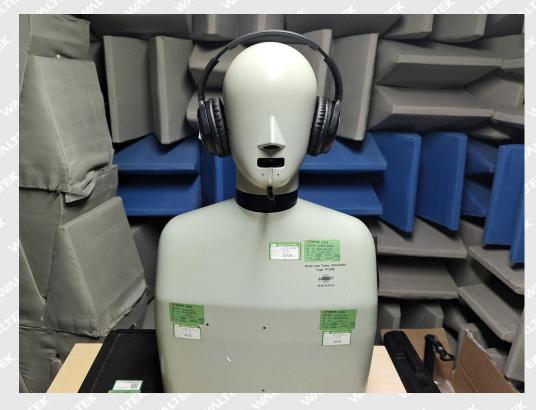


Photo 7



Photo 8

===== End of Report =====