

# **RF Test Report**

Report No.: AGC05443231047ER02

**PRODUCT DESIGNATION**: Magnetic wireless charger

**BRAND NAME** : N/A

MODEL NAME : MO6472

**APPLICANT**: MID OCEAN BRANDS B.V

**DATE OF ISSUE** : Nov. 07, 2023

**STANDARD(S)** : ETSI EN 303 417 V1.1.1(2017-09)

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.



Page 2 of 31

#### REPORT REVISE RECORD


Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Nov. 07, 2023	Valid	Initial Release



### Report No.: AGC05443231047ER02 Page 3 of 31

# **TABLE OF CONTENTS**

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	
3. DESCRIPTION OF TEST ITEMS	6
4. TEST FACILITY	6
5. ETSI EN 303 417 REQUIREMENT	7
5.1 TRANSMITTER H-FIELD REQUIREMENTS	7
5.2 OPERATING FREQUENCY RANGES	12
5.3 TRANSMITTER OUT OF BAND (OOB) EMISSIONS	15
5.4 TRANSMITTER SPURIOUS EMISSIONS	
5.5 RECEIVER BLOCKING	
6. INTERPRETATION OF MEASUREMENT RESULTS	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	30
APPENDIX B: PHOTOGRAPHS OF THE EUT	31





#### 1. TEST RESULT CERTIFICATION

Applicant	MID OCEAN BRANDS B.V
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Manufacturer	MID OCEAN BRANDS B.V
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Factory	MID OCEAN BRANDS B.V
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Product Designation	Magnetic wireless charger
Brand Name	N/A
Test Model	MO6472
Series Model	N/A
Difference description	N/A
Date of receipt of test	Oct. 31, 2023
Date of test	Oct. 31, 2023 to Nov. 07, 2023
Deviation	None
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-EC-WPT-RF

The above equipment was tested by SHENZHEN ATTESTATION OF GLOBAL COMPLIANCE (SHENZHEN) CO., LTD. for compliance with the requirements set forth in the European Standard ETSI EN 303 417 V1.1.1. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared By	Cocili	
	Cici Li (Project Engineer)	Nov. 07, 2023
Reviewed By	Calvin Lin	
	Calvin Liu (Reviewer)	Nov. 07, 2023
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Nov. 07, 2023



Report No.: AGC05443231047ER02 Page 5 of 31

#### 2. EUT DESCRIPTION

Details of technical specification refer to the description in follows:

Hardware Version	V1.0
Software Version	V1.0
Operate Frequency	110kHz-205kHz
Modulation Type	ASK
ocw	Energy transmission: Low channel 0.914kHz, Middle Channel 0.916kHz, High channel 0.913kHz Data communication: 0.887kHz
Test Channels	Energy transmission: Low channel 127.6kHz, Middle Channel 126.8kHz, High channel 128.4kHz Data communication: 126.6kHz
Antenna Type	Coil Antenna
Operational Mode	Mode 1: base station in stand-by, idle mode Mode 3: communication Mode 4: energy transmission
EUT Input Rating	DC 9V 1.5A / DC 5V 2A
EUT Output Rating	DC 9V 1.1A / DC 5V 1A

**NOTE:** 1. For more information, please refer to User's Manual.

- 2. During the initial establishment of the charging mode (mode 2), no or very low emission occur (below the sensitivity level of the test set-up), so the mode 2 can be assumed as irrelevant for the test.
- 3. Mode 3 and mode 4 have been performed within one set-up, worst-case alignment. But each mode have been tested separately with specific test software.
- 4. The maximum temperature of 40 is not a standard requirement and is measured according to the maximum service temperature stated by the manufacturer.



Page 6 of 31

#### 3. DESCRIPTION OF TEST ITEMS

	Harmonised Standard ETSI EN 303 417				
	Requirement	Requirement Conditionality			
No	Description	Requirement conditionality			
1	Permitted range of operating frequencies				
2	Operating frequency ranges				
3	H-field requirements				
4	Transmitter spurious emissions				
5	Transmitter out of band (OOB) emissions				
6	WPT system unwanted conducted emissions	☐ Applicable ☒ Not Applicable			
7	Receiver blocking				

#### 4. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		



Page 7 of 31


#### 5. ETSI EN 303 417 REQUIREMENT

# **5.1 TRANSMITTER H-FIELD REQUIREMENTS**

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024

#### **TEST SETUP:**

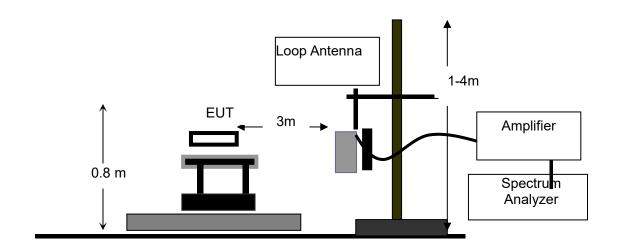



Page 8 of 31

#### **TEST LIMITS:**

The H-field limit in  $dB\mu A/m$  at 3 m,  $H_{3m}$ , is determined by the following equation:

$$H_{3m} = H_{10m} + C_3 (F.2)$$

Where:H<sub>10m</sub> is the H-field limit in dBµA/m at 10 m distance according to the present document; andC<sub>3</sub> is a conversion factor in dB determined from figure F.2.

According to EN 303 417 Tablet 3,

Table 3: H-field limits

Frequency range [MHz]	H-field strength limit [dBµA/m at 10 m]	Comments	
0,019 ≤ f < 0,021	72	10	
0,059 ≤ f < 0,061	69,1 descending 10 dB/dec above 0,059 MHz	See note 1	
0,079 ≤ f < 0,090	67,8 descending 10 dB/dec above 0,079 MHz	See note 2	
0,100 ≤ f < 0,119	42		
0,119 ≤ f < 0,135	66 descending 10 dB/dec above 0,119 MHz	See note 1	
0,135 ≤ f < 0,140	42		
0,140 ≤ f < 0,1485	37,7		
0,1485 ≤ f < 0,30	-5		
6,765 ≤ f < 6,795	42		

NOTE 1: Limit is 42 dBµA/m for the following spot frequencies: 60 kHz ± 250 Hz and 129,1 kHz ± 500 Hz.
NOTE 2: At the time of preparation of the present document the feasibility of increased limits for high power wireless power transmission systems to charge vehicles [i.4] was prepared. New specific requirements for such systems (e.g. higher H-field emission limits in the 79 - 90 kHz band) will be reflected within a future revision of the present document.



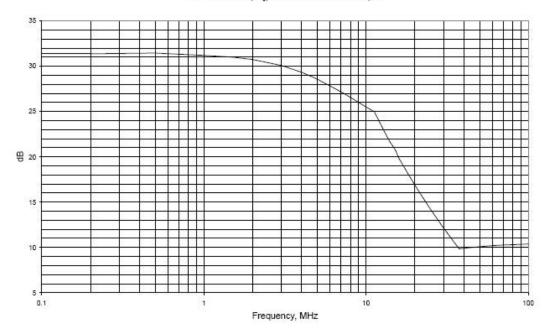


Figure F.2: Conversion factor C<sub>3</sub> versus frequency



Report No.: AGC05443231047ER02 Page 9 of 31

#### **TEST PROCEDURE:**

The EUT was placed on the top of an insulating table 0.8 meters above the ground at a semi-anechoic chamber.

The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The H-field is measured with a shielded loop antenna connected to a measurement receiver.

The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 Table 11.

The EUT operate with modulation under normal and extreme conditions.

#### **TEST RESULTS:**

Test Mode: Mode 1

#### Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	9.0	Worst case
TL/VL	-10℃	8.1	
TH/VL	45℃	8.1	
TL/VH	-10℃	9.9	
TH/VH	45℃	9.9	

#### Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit	
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)	
0.1258	23.53	-5.67	17.86	96.96	

#### Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1258	23.53	-36.87	-13.34	65.76



Page 10 of 31

Test Mode: Mode 3

#### Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	9.0	Worst case
TL/VL	-10℃	8.1	
TH/VL	45℃	8.1	
TL/VH	-10℃	9.9	
TH/VH	45℃	9.9	

#### Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1266	23.53	3.56	27.09	62.40

#### Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1266	23.53	-22.88	0.65	31.20



Page 11 of 31

#### Test Mode: Mode 4

#### Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	9.0	Worst case
TL/VL	-10℃	8.1	
TH/VL	45℃	8.1	
TL/VH	-10℃	9.9	
TH/VH	45℃	9.9	

#### Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1276	23.53	2.54	26.07	96.92
0.1268	23.53	-5.63	17.90	96.92
0.1284	23.53	-7.54	15.99	96.92

# Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1276	23.53	-28.66	-5.13	65.72
0.1268	23.53	-36.83	-13.30	65.72
0.1284	23.53	-38.74	-15.21	65.72

#### Remark:

(1) Corrected Level (dBuA/m) = Reading Level + Antenna Factor

(2) For the calculated method, please refer to Annex F at EN 300330.

(3) All extreme conditions were considered for test, but only record the worst case.




Page 12 of 31

#### **5.2 OPERATING FREQUENCY RANGES**

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024

#### **TEST SETUP:**

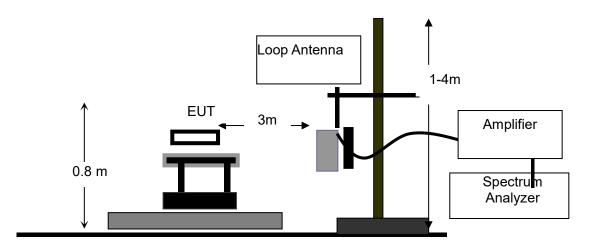

#### **TEST PROCEDURE:**

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by normal signal,
- 3).Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5kHz, Detector=RMS. The 99 % OBW function shall be used to determine the operating frequency range, fH is the frequency of the upper marker resulting from the OFR, fL is the frequency of the lower marker resulting from the OFR.
- 4), Both normal test condition and extreme test condition applied

#### **LIMITS**

The operating frequency range for emissions shall be within one of the following limits: 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz.



Report No.: AGC05443231047ER02 Page 13 of 31

#### **TEST RESULT**

Test Mode: Mode 1

# Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit
-10°C	9.9	125.354	126.247	100kHz≤&≤300kHz
-10 C	8.1	125.353	126.242	100kHz≤&≤300kHz
25℃	9.0	125.353	126.247	100kHz≤&≤300kHz
45℃	9.9	125.354	126.244	100kHz≤&≤300kHz
45 C	8.1	125.354	126.247	100kHz≤&≤300kHz
OFR		0.89	94kHz	
Result	s	PASS		

Test Mode: Mode 3

# Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit
-10°C	9.9	126.161	127.041	100kHz≤&≤300kHz
-10 C	8.1	126.160	127.043	100kHz≤&≤300kHz
25℃	9.0	126.157	127.044	100kHz≤&≤300kHz
45℃	9.9	126.157	127.043	100kHz≤&≤300kHz
45 (	8.1	126.159	127.043	100kHz≤&≤300kHz
OFR		0.887kHz		
Result	s	PASS		



Page 14 of 31

Test Mode: Mode 4

# Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit
-10°C	9.9	127.146	128.852	100kHz≤&≤300kHz
-10 C	8.1	127.147	128.856	100kHz≤&≤300kHz
25℃	9.0	127.143	128.857	100kHz≤&≤300kHz
45℃	9.9	127.145	128.854	100kHz≤&≤300kHz
45 C	8.1	127.148	128.855	100kHz≤&≤300kHz
OFR		1.714kHz		
Results	Results PASS			ASS

**NOTE:** All the modes had been tested, but only the worst data recorded in the report.




Page 15 of 31

# 5.3 TRANSMITTER OUT OF BAND (OOB) EMISSIONS

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
Power amplifer	AR	75A250	18464	N/A	N/A
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024

#### **TEST SETUP:**

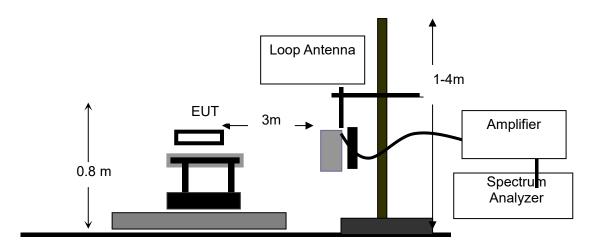

#### **TEST PROCEDURE:**

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by normal signal,
- 3).Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5KHz, Detector=RMS. The 99 % OBW function shall be used to determine the operating frequency range, fH is the frequency of the upper marker resulting from the OFR, fL is the frequency of the lower marker resulting from the OFR.
- 4), Both normal test condition and extreme test condition applied



#### **LIMITS**

The OOB limits are visualized in figures; they are descending from the intentional limits from Table 3 at fH/fL with 10 dB/decade.

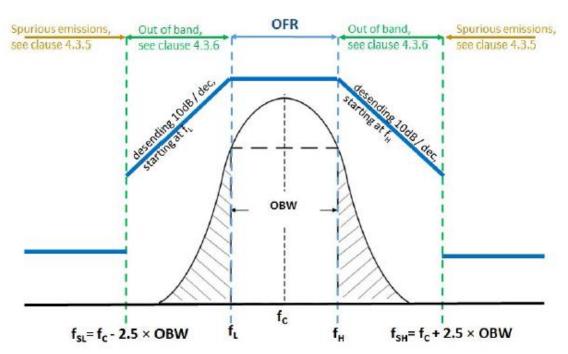


Figure 4: Out of band and spurious domain of a single frequency WPT system

# TEST RESULT

Test Mode: Mode 1

Freque	Frequency range (KHz)		Limit @ 10m (dBuA/m)	Result
fSL -fL	123.565 to 125.353	Less than -22.5	See figure 4	Pass
fL	125.353	-22.50	65.76	Pass
fH	126.247	-23.02	65.76	Pass
fH - fSH	126.247 to 128.035	Less than -23.02	See figure 4	Pass

Test Mode: Mode 3

Frequency range (KHz)		Maximum level @10m (dBuA/m)	Limit @ 10m (dBuA/m)	Result
fSL-fL	124.383 to 126.157	Less than -8.51	See figure 4	Pass
fL	126.157	-8.51	31.20	Pass
fH	127.044	-9.03	31.20	Pass
fH-fSH	127.044 to 128.818	Less than -9.03	See figure 4	Pass



Page 17 of 31

Test Mode: Mode 4

Frequency range (KHz)		Maximum level @10m (dBuA/m)	Limit @ 10m (dBuA/m)	Result
fSL-fL	125.315 to 127.143	Less than -14.29	See figure 4	Pass
fL	127.143	-14.29	65.72	Pass
fH	128.857	-24.89	65.72	Pass
fH-fSH	128.857 to 130.683	Less than -24.89	See figure 4	Pass

NOTE: All the modes had been tested, but only the worst data recorded in the report.



Page 18 of 31


#### **5.4 TRANSMITTER SPURIOUS EMISSIONS**

#### **MEASUREMENT EQUIPMENT USED:**


NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
Power amplifer	AR	75A250	18464	N/A	N/A
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2025

#### **TEST SETUP:**

FREQUENCY RANGE (9KHZ-30MHZ)

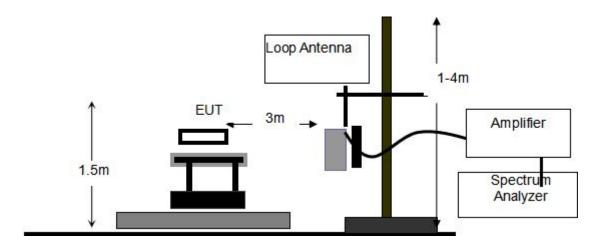

# FREQUENCY RANGE (ABOVE 30MHZ)

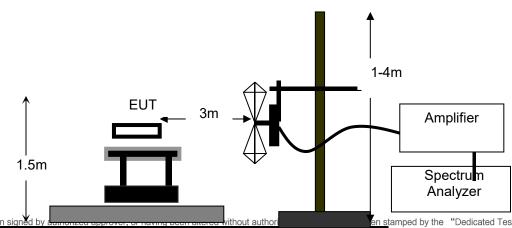




Page 19 of 31

#### **SUBSTITUTION METHOD:**

#### **RADIATED BELOW 1GHZ**

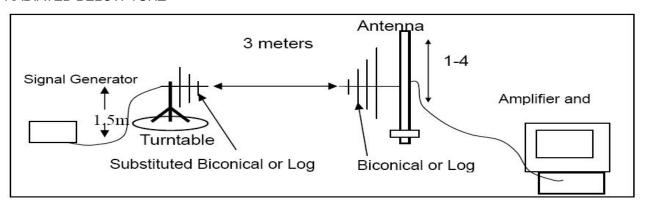

#### **TEST PROCEDURE:**

For test method of frequency range (9kHz-30MHz)

The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The H-field is measured with a shielded loop antenna connected to a measurement receiver.

The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 Table 1.

For test method of frequency range (30 MHz-1000MHz)

EUT was placed on a 1.5m height wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.

The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produce a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB EIRP or ERP, correcting for substitution antenna gain at each frequency.



Page 20 of 31

#### **LIMITS OF RADIATED DISTURBANCES**

Below 30MHz

# Table 4

State (see note)	Frequency 9 kHz ≤ f < 10 MHz	Frequency 10 MHz ≤ f < 30 MHz	
Operating	27 dBμA/m at 9 kHz descending 10 dB/dec	-3,5 dBμA/m	
Standby	5,5 dBμA/m at 9 kHz descending 10 dB/dec	-25 dBμA/m	
	g" means mode 2, 3 and 4 according to Ta to Table 2.	able 2; "standby" means mode 1	

ABOVE 30MHz

#### Table 5

State (see note)	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies between 30 MHz to 1 000 MHz
Operating	4 nW	250 nW
Standby	2 nW	2 nW
NOTE: "Operating" means	mode 2, 3 and 4 according to Table 2;	"standby" means mode 1 according to
Table 2.		



Page 21 of 31

#### **TEST LIMITS & RESULT**

**Test Mode: Mode 3** 

FREQUENCY RANGE (9KHZ-30MHZ)

	Operation Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin						
(MHz)	(dB µA)	(dB/m )	(dB μA/m)	(dBµA/m)	(dBµA/m)						
0.058	-7.64	-7.96	-15.60	18.87	34.47						
0.225	-11.09	-7.96	-19.05	13.02	32.08						
0.680	-12.43	-7.96	-20.39	8.22	28.61						
1.626	-14.30	-3.98	-18.28	4.43	22.71						
3.070	-13.19	-3.09	-16.28	1.67	17.95						
3.850	-12.56	-1.25	-13.81	0.69	14.50						

#### Remark:

- (1) Corrected Power (dBm)= Total Factor + Reading Level
- (2) Measuring frequencies from 9KHz to the 30MHz.

Data of measurement within this frequency range shown " -- " in the table above means the

reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 22 of 31

#### FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
77.25	31.99	V	-60.80	0.04	-0.70	-61.54	-36.00	25.54
155.64	27.40	V	-66.62	0.06	0.70	-65.98	-36.00	29.98
355.78	30.20	V	-69.88	0.25	6.15	-63.98	-36.00	27.98
429.05	26.31	V	-73.40	0.34	6.92	-66.82	-36.00	30.82
626.11	29.80	V	-69.30	0.51	7.14	-62.67	-54.00	8.67
755.04	28.07	V	-70.46	0.61	6.35	-64.72	-36.00	28.72
82.14	31.86	Н	-61.60	0.04	0.22	-61.42	-36.00	25.42
153.97	26.24	Н	-68.18	0.06	0.70	-67.54	-36.00	31.54
353.07	29.97	Н	-69.58	0.25	5.89	-63.94	-36.00	27.94
433.06	27.81	Н	-72.71	0.34	6.69	-66.36	-36.00	30.36
632.76	28.01	Н	-71.27	0.52	7.26	-64.53	-54.00	10.53
730.37	27.82	Н	-72.48	0.59	6.80	-66.27	-36.00	30.27

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Page 23 of 31

# Test Mode: Mode 4(The low channel is the worst case) FREQUENCY RANGE (9KHZ-30MHZ)

Operation Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin					
(MHz)	(dB μA)	(dB/m )	(dB μA/m)	(dBµA/m)	(dBµA/m)					
0.026	-7.71	-7.96	-15.67	22.41	38.07					
0.311	-11.28	-7.96	-19.24	11.61	30.85					
0.647	-12.79	-7.96	-20.75	8.43	29.18					
1.445	-14.40	-3.98	-18.38	4.94	23.33					
2.678	-13.45	-3.09	-16.54	2.26	18.81					
4.768	-12.57	-1.25	-13.82	-0.24	13.58					

#### Remark:

- (1) Corrected Power (dBm) = Total Factor + Reading Level
- (2) Measuring frequencies from 9KHz to the 30MHz.
- Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 24 of 31

#### FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
79.31	31.82	V	-60.75	0.04	-0.30	-61.09	-36.00	25.09
154.08	27.26	V	-67.37	0.06	0.70	-66.73	-36.00	30.73
356.80	31.04	V	-67.69	0.25	6.28	-61.66	-36.00	25.66
428.62	27.92	V	-72.78	0.34	6.94	-66.17	-36.00	30.17
626.13	29.21	V	-70.06	0.51	7.14	-63.44	-54.00	9.44
760.28	27.40	V	-71.01	0.61	6.60	-65.02	-36.00	29.02
86.27	31.94	Н	-61.41	0.04	0.84	-60.61	-36.00	24.61
156.50	27.45	Н	-67.40	0.06	0.80	-66.66	-36.00	30.66
351.66	28.66	Н	-68.95	0.25	5.63	-63.56	-36.00	27.56
432.29	26.80	Н	-72.70	0.34	6.76	-66.28	-36.00	30.28
633.01	29.26	Н	-71.18	0.52	7.24	-64.46	-54.00	10.46
729.79	27.64	Н	-71.58	0.59	6.75	-65.42	-36.00	29.42

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Page 25 of 31

Test Mode: Mode 1

FREQUENCY RANGE (9KHZ-30MHZ)

Standby Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin					
(MHz)	(dB µA)	(dB/m )	(dB μA/m)	(dBµA/m)	(dBµA/m)					
0.068	-7.47	-7.96	-15.43	-3.27	12.16					
0.255	-10.33	-7.96	-18.29	-9.02	9.26					
0.467	-11.38	-7.96	-19.34	-11.65	7.69					
1.738	-23.43	-3.98	-27.41	-17.36	10.06					
3.403	-28.10	-3.09	-31.19	-20.28	10.91					
5.829	-26.67	-1.25	-27.92	-22.61	5.30					

#### Remark:

- (1) Corrected Power (dBm) = Total Factor + Reading Level
- (2) Measuring frequencies from 9KHz to the 30MHz.
- Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 26 of 31

#### FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
76.35	26.27	V	-65.86	0.04	-0.90	-66.80	-57.00	9.80
161.05	28.85	V	-65.82	0.06	1.28	-64.60	-57.00	7.60
355.96	28.38	V	-71.01	0.25	6.15	-65.11	-57.00	8.11
532.86	27.02	V	-72.56	0.44	6.72	-66.29	-57.00	9.29
675.19	31.02	V	-69.02	0.55	6.60	-62.97	-57.00	5.97
833.74	29.08	V	-70.15	0.66	6.51	-64.30	-57.00	7.30
134.27	27.28	Н	-66.83	0.05	0.02	-66.86	-57.00	9.86
163.78	28.79	Н	-65.96	0.06	1.44	-64.58	-57.00	7.58
343.85	30.98	Н	-67.01	0.24	5.64	-61.60	-57.00	4.60
540.42	27.97	Н	-71.73	0.45	7.20	-64.98	-57.00	7.98
677.09	29.62	Н	-69.33	0.55	6.52	-63.36	-57.00	6.36
828.83	28.39	Н	-69.81	0.66	6.40	-64.07	-57.00	7.07

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.




Page 27 of 31

#### 5.5 RECEIVER BLOCKING

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
MXG X-Series Vector Signal Generator	Agilent	N5182B	MY53050647	Mar. 03, 2023	Mar. 02, 2024
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Clamp meter	PROVA	PROVA-11	17200101	Sep. 11, 2023	Sep. 12, 2024

#### **TEST SETUP:**

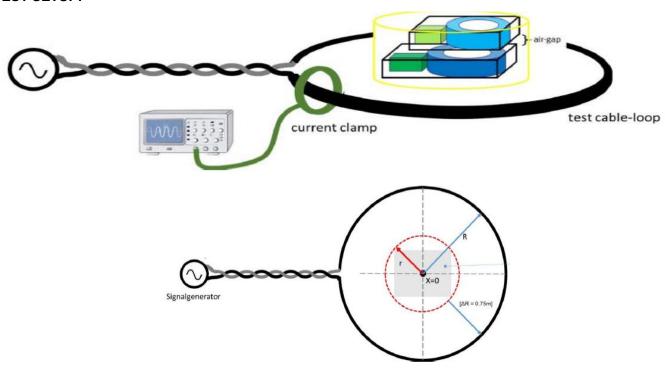

#### **TEST PROCEDURE:**

- 1). The test shall be carried out inside a test chamber according to clauses C.1.1 and C.1.2 in ETSI EN 300 330
- 2). A test loop with a radius r shall be used to create the magnetic field; the test loop shall lie on a non-metallic ground and the minimum distance to metallic objects (e.g. ground plane) shall be 0,75 m.The EUT shall be placed to the centre of the test-loop
- 3). The test loop shall be sufficiently large so that the test loop itself does not influence the WPT system; The radius R of the test-loop shall be in minimum  $\Delta R = 0.75$  m larger than the maximum dimension r of the EUT.

$$R >= r + \Delta R$$
.

The maximum H-Field can be calculated from the loop current I (into the test-loop) with the following formula:

H=I/2R



Report No.: AGC05443231047ER02 Page 28 of 31

4)The required output current to achieve the required magnetic field at the WPT system shall be generated with a signal generator (unmodulated signal) at the test frequencies. For each test frequency the "reaction" of the device shall be recorded and checked against the performance criterion

#### **LIMITS**

The EUT shall achieve the wanted performance criterion, in the presence of the blocking signal.

Table 6: Receiver blocking limits

8	In-band signal	OOB signal	Remote-band signal
Frequency	Centre frequency (f <sub>c</sub> ) of the WPT	$f = f_c \pm F$ (see note)	$f = f_c \pm 10 \times F$ (see note)
	system (see clause 4.3.3)	253	25.3
Signal level field strength at	72 dBμA/m	72 dBµA/m	82 dBµA/m
the EUT	2 000 000 000 000 000 000 000 000 000 0	0.000 VEX.000 12 •0.000 VEX.000 VE	
NOTE: F = OFR see claus	e 4.3.3.		

#### **TEST RESULT**

Test Mode: Mode 1

Test I	Frequency(KHz)	Signal level @ EUT	Performance	Result
In-band signal	125.800	72dBuA/m	No function loss	Pass
OOB signal	124.906	72dBuA/m	No function loss	Pass
	126.694	72dBuA/m	No function loss	Pass
Remote-band	116.860	82dBuA/m	No function loss	Pass
signal	134.740	82dBuA/m	No function loss	Pass

Test Mode: Mode 3

Test F	Frequency(KHz)	Signal level @ EUT	Performance	Result
In-band signal	126.600	72dBuA/m	No function loss	Pass
OOB signal	125.713	72dBuA/m	No function loss	Pass
OOB signal	127.487	72dBuA/m	No function loss	Pass
Remote-band	117.730	82dBuA/m	No function loss	Pass
signal	135.470	82dBuA/m	No function loss	Pass




Page 29 of 31

#### 6. INTERPRETATION OF MEASUREMENT RESULTS

All the measurement equipments and accessories have been carefully selected to meet the maximum measurement uncertainty specified below:

DE Fraguency	± 1 x 10 <sup>-7</sup>
RF Frequency	± 1 X 10 ·
RF Power, Conducted	± 0.75dB
Maximum Frequency Deviation: _ Within 300Hz and 6KHz of Audio Frequency _ Within 6KHz and 25KHz of Audio Frequency	± 5% ± 3dB
Adjacent channel power	± 3dB
Conducted Emission of Transmitter, Valid Up to 12.75GHz	± 4dB
Conducted Emissions of Receivers	± 3dB
Radiated Emission of Transmitter, Valid Up to 12.75GHz	± 6dB

P.S. Uncertainty figures are valid to confidence level of 95% calculated according to the methods described in the ETSI TR 100 028.





#### APPENDIX A: PHOTOGRAPHS OF TEST SETUP







Page 31 of 31

### APPENDIX B: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC05443231047AP01
----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.



# **Health Test Report**

Report No.: AGC05443231047EH01

**PRODUCT DESIGNATION**: Magnetic wireless charger

**BRAND NAME** : N/A

MODEL NAME : M06472

**APPLICANT**: MID OCEAN BRANDS B.V

**DATE OF ISSUE** : Nov. 07, 2023

**STANDARD(S)** : EN IEC 62311:2020

EN 50665:2017

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.



Page 2 of 13

#### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Nov. 07, 2023	Valid	Initial release



Page 3 of 13

# **TABLE OF CONTENTS**

1. GENERAL INFORMATION	
2. TECHNICAL INFORMATION	5
3. EN 62311 RF EXPOSURE MEASUREMENT	
3.1 INTRODUCTION	7
4. TEST EQUIPMENT LIST	9
5. EUT OPERATION CONDITION	9
6. TEST RESULT	10
7. CONCLUSION	10
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	11



Page 4 of 13

#### 1. GENERAL INFORMATION

A 11 /	I
Applicant	MID OCEAN BRANDS B.V
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Manufacturer	MID OCEAN BRANDS B.V
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Factory	MID OCEAN BRANDS B.V
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.
Product Designation	Magnetic wireless charger
Brand Name	N/A
Test Model	MO6472
Series Model	N/A
Difference description	N/A
Date of receipt of test item	Oct. 31, 2023
Date of test	Oct. 31, 2023 to Nov. 07, 2023
Test Result	Pass

We (AGC), Attestation of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements set forth in the European Standard EN IEC 62311:2020. The results of testing in this report apply to the product/system which was tested only.

Prepared By	Cocili	
	Cici Li (Project Engineer)	Nov. 07, 2023
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Nov. 07, 2023
Approved By	Max Zhang	
•	Max Zhang (Authorized Officer)	Nov. 07, 2023



Page 5 of 13

#### 2. TECHNICAL INFORMATION

Note: the following data is based on the information by the applicant.

Product Designation	Magnetic wireless charger
Brand Name	N/A
Test Model	MO6472
Hardware Version	V1.0
Software Version	V1.0
Operation Frequency	110kHz-205kHz
Modulation type	ASK
Antenna Type	Coil Antenna
Antenna Gain	0dBi
EUT Input Rating	DC 9V 1.5A / DC 5V 2A
EUT Output Rating	DC 9V 1.1A / DC 5V 1A

Note: For more details, please refer to the user's manual of the EUT.



Page 6 of 13

#### 3. EN 62311 RF EXPOSURE MEASUREMENT

#### 3.1 INTRODUCTION

This International Standard applies to electronic and electrical equipment for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.

This generic standard applies to electronic and electrical apparatus for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.

The frequency range covered is 0 Hz to 300 GHz.

The object of this generic standard is to provide assessment methods and criteria to evaluate such equipment against basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields and induced and contact current.

**NOTE**: This standard is intended to cover both intentional and non-intentional radiators. If the equipment complies with the requirements in another relevant standard, e.g. EN 62479 covering low power equipment, then the requirements of this standard (IEC 62311) are considered to be met and the application of this standard to that equipment is not necessary.



Page 7 of 13

#### 3.2 TEST LIMIT

According to EN IEC 62311:2020, Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz – 300 GHz).

#### Annex F Measurement of E and H field

A commonly used probe size is 100 cm<sup>2</sup>, also the contribution of the three axes X, Y and Z can be evaluated separately.

Reference levels for electric, magnetic and electromagnetic fields (0 Hz to 300 GHz, unperturbed rms values)

Frequency range	E-field strength (V/m)	H-field strength (A/m)	B-field (μT)	Equivalent plane wave power density S <sub>eq</sub> (W/m²)
0-1 Hz	_	3,2 × 10 <sup>4</sup>	4 × 10 <sup>4</sup>	_
1-8 Hz	10 000	$3,2 \times 10^4/f^2$	$4 \times 10^4/f^2$	<u></u>
8-25 Hz	10 000	4 000/f	5 000/f	
0,025-0,8 kHz	250/f	4/f	5/f	_
0,8-3 kHz	250/f	5	6,25	<u></u>
3-150 kHz	87	5	6,25	<u></u>
0,15-1 MHz	87	0,73/f	0,92/f	-
1-10 MHz	87/f <sup>1/2</sup>	0,73/f	0,92/f	
10-400 MHz	28	0,073	0,092	2
400-2 000 MHz	1,375 f <sup>1/2</sup>	0,0037 f <sup>1/2</sup>	0,0046 f <sup>1/2</sup>	f/200
2-300 GHz	61	0,16	0,20	10




Page 8 of 13

#### 3.3 EVALUATION METHODS

#### Measurement of E and H field

A commonly used probe size is 100 cm<sup>2</sup>, also the contribution of the three axes X, Y and Z can be evaluated separately.

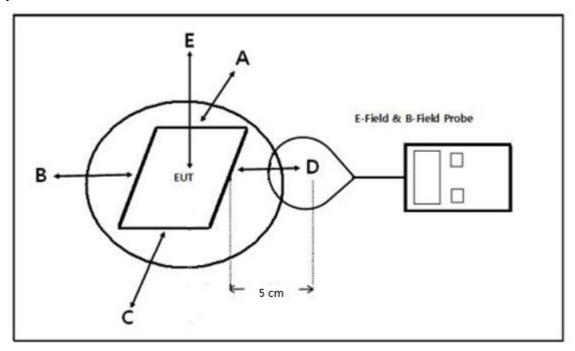

Note: Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT; Position E: Top of EUT

Based on the above standard limit, any device with output power below 5A/m cannot produce an exposure exceeding this restriction under the most pessimistic exposure conditions.



Page 9 of 13

# 4. TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Broadband Field Meter	WAVECONTROL	SMP2	J-0004	Feb. 24, 2023	Feb. 23, 2025
Probe FHP	WAVECONTROL	WP400	J-0015	Feb. 24, 2023	Feb. 23, 2025

# 5. EUT OPERATION CONDITION

NO.	TEST MODE DESCRIPTION		
1	Wireless Full Load Mode		
2	Wireless Half Load Mode		
3	Wireless Null Load Mode		
Note: 1. Note: A	Note: 1. Note: All modes have been tested and only the worst mode test data recorded in the test report.		



Page 10 of 13

#### 6. TEST RESULT

Frequency (MHz)	Maximum Radiated H-Field at 5cm (A/m)		Limit (A/m)	Result (Pass/Fail)
110kHz-205kHz	position E	0.047	5	Pass
	position A	0.031		
	position B	0.025		
	position C	0.016		
	position D	0.024		

Since Radiated H-Field at worse case is 0.047A/m which cannot exceed the exempt condition, 5A/m. It is deemed to full fit the requirement of RF exposure basic restrisction specified in EC Council Recommendation (1999/519/EC).

#### 7. CONCLUSION


Remark: EUT meets the basic requirements in the standard.




Page 11 of 13

# **APPENDIX I: PHOTOGRAPHS OF TEST SETUP**

WPT Equipment\_Position E

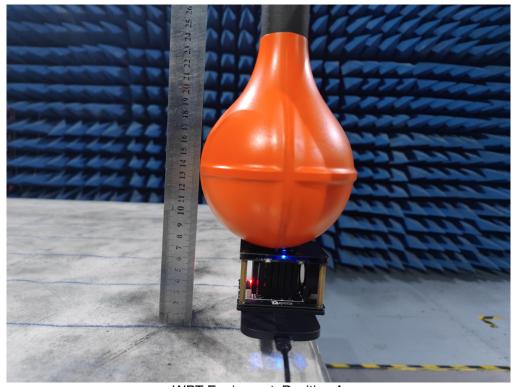


WPT Equipment\_Position A

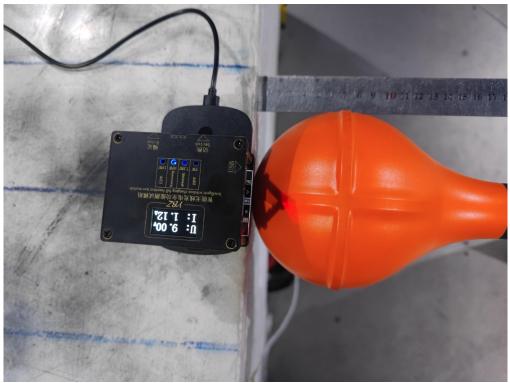




Page 12 of 13

# WPT Equipment\_Position B

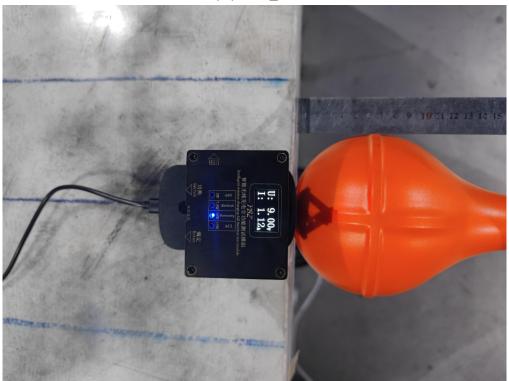


WPT Equipment\_Position C

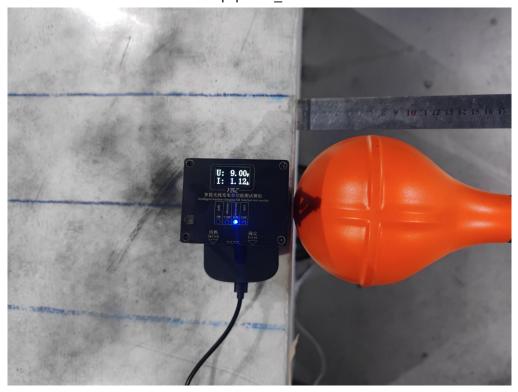



Page 13 of 13

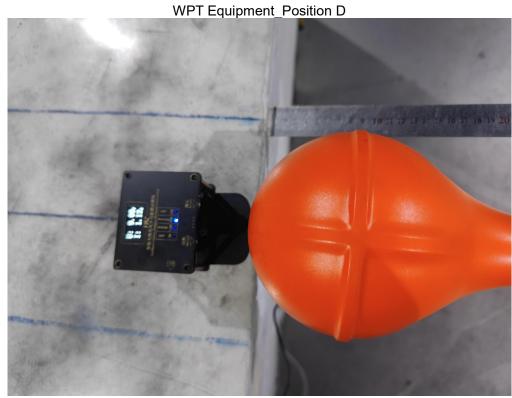

----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.