

# **RF Test Report**

Report No.: AGC05443220916EE17

**PRODUCT DESIGNATION**: wireless charger with phone stand

BRAND NAME : N/A

MODEL NAME : M06823

**APPLICANT** : MID OCEAN BRANDS B.V

**DATE OF ISSUE** : Sep. 23, 2022

**STANDARD(S)** : ETSI EN 303 417 V1.1.1(2017-09)

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.





Page 2 of 32

#### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 23, 2022	Valid	Initial Release



Page 3 of 32

#### **TABLE OF CONTENTS**

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST ITEMS	6
4. TEST FACILITY	6
5. ETSI EN 303 417 REQUIREMENT	7
5.1 TRANSMITTER H-FIELD REQUIREMENTS	7
5.2 OPERATING FREQUENCY RANGES	12
5.3 TRANSMITTER OUT OF BAND (OOB) EMISSIONS	15
5.4 TRANSMITTER SPURIOUS EMISSIONS	19
5.5 RECEIVER BLOCKING	28
6. INTERPRETATION OF MEASUREMENT RESULTS	30
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	31
ADDENING BY DHOTOGRADHS OF THE FIIT	32



Report No.: AGC05443220916EE17 Page 4 of 32

#### 1. TEST RESULT CERTIFICATION

Applicant	MID OCEAN BRANDS B.V		
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong		
Manufacturer	MID OCEAN BRANDS B.V		
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong		
Factory	MID OCEAN BRANDS B.V		
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong		
Product Designation	wireless charger with phone stand		
Brand Name	N/A		
Test Model	MO6823		
Date of test	Sep. 14, 2022 to Sep. 22, 2022		
Deviation	None		
Condition of Test Sample	Normal		
Test Result	Pass		
Report Template	AGCRT-EC-RF		

The above equipment was tested by SHENZHEN ATTESTATION OF GLOBAL COMPLIANCE (SHENZHEN) CO., LTD. for compliance with the requirements set forth in the European Standard ETSI EN 303 417 V1.1.1. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared By	Bibo thay	
	Bibo Zhang (Project Engineer)	Sep. 23, 2022
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Sep. 23, 2022
Approved By	Max Zhang	
•	Max Zhang (Authorized Officer)	Sep. 23, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 5 of 32

#### 2. EUT DESCRIPTION

Details of technical specification refer to the description in follows:

Hardware Version	BM3016C-RZ-V1.0	
Software Version	V1.0	
Operate Frequency 110KHz-205KHz		
Modulation Type	ASK	
CCW  Energy transmission: Low channel 0.964KHz, Middle Channel 0.957kHz High channel 0.961KHz Data communication: 0.971KHz		
Test Channels  Energy transmission: Low channel 125.2KHz, Middle Channel 147.3kHz High channel 159.4KHz Data communication: 144.6KHz		
Antenna Type	Coil Antenna	
Operational Mode  Mode 1: base station in stand-by, idle mode  Mode 3: communication  Mode 4: energy transmission		
Power Supply	DC 5V by adapter	
Input Rating	DV 5V/2A, DC 9V/1.67A	
Output Rating	DC 5V/1A, DC 9V/1.12A, DC 9V/1.67A (15W)	
Wireless Charging Output Power	15W(Max 15W)	

**NOTE:** 1. For more information, please refer to User's Manual.

- 2. During the initial establishment of the charging mode (mode 2), no or very low emission occur (below the sensitivity level of the test set-up), so the mode 2 can be assumed as irrelevant for the test.
- 3. Mode 3 and mode 4 have been performed within one set-up, worst-case alignment. But each mode have been tested separately with specific test software.
- 4. The maximum temperature of 40 is not a standard requirement and is measured according to the maximum service temperature stated by the manufacturer.



Page 6 of 32

#### 3. DESCRIPTION OF TEST ITEMS

Harmonised Standard ETSI EN 303 417				
	Requirement	Requirement Conditionality		
No Description		- Requirement containing		
1	Permitted range of operating frequencies			
2	Operating frequency ranges			
3	H-field requirements			
4	Transmitter spurious emissions			
5	Transmitter out of band (OOB) emissions			
6	WPT system unwanted conducted emissions	☐ Applicable ☒ Not Applicable		
7	Receiver blocking			

#### 4. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	



Page 7 of 32


#### 5. ETSI EN 303 417 REQUIREMENT

#### **5.1 TRANSMITTER H-FIELD REQUIREMENTS**

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024

#### **TEST SETUP:**

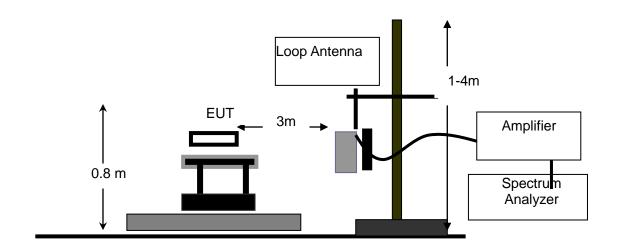



Page 8 of 32

#### **TEST LIMITS:**

The H-field limit in  $dB\mu A/m$  at 3 m,  $H_{3m}$ , is determined by the following equation:

$$H_{3m} = H_{10m} + C_3 (F.2)$$

Where:H<sub>10m</sub> is the H-field limit in dBµA/m at 10 m distance according to the present document; andC<sub>3</sub> is a conversion factor in dB determined from figure F.2.

According to EN 303 417 Tablet 3,

Table 3: H-field limits

Frequency range [MHz]	H-field strength limit [dBµA/m at 10 m]	Comments	
0,019 ≤ f < 0,021	72		
0,059 ≤ f < 0,061	69,1 descending 10 dB/dec above 0,059 MHz	See note 1	
0,079 ≤ f < 0,090	67,8 descending 10 dB/dec above 0,079 MHz	See note 2	
0,100 ≤ f < 0,119	42		
0,119 ≤ f < 0,135	66 descending 10 dB/dec above 0,119 MHz	See note 1	
0,135 ≤ f < 0,140	42		
0,140 ≤ f < 0,1485	37,7		
$0,1485 \le f < 0,30$	-5		
6,765 ≤ f < 6,795	42		

NOTE 1: Limit is 42 dBμA/m for the following spot frequencies: 60 kHz ± 250 Hz and 129,1 kHz ± 500 Hz.
NOTE 2: At the time of preparation of the present document the feasibility of increased limits for high power wireless power transmission systems to charge vehicles [i.4] was prepared. New specific requirements for such systems (e.g. higher H-field emission limits in the 79 - 90 kHz band) will be reflected within a future revision of the present document.



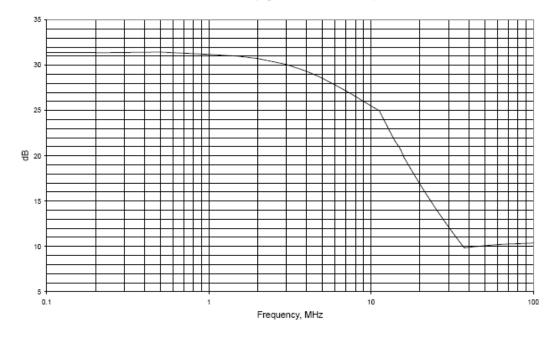


Figure F.2: Conversion factor C<sub>3</sub> versus frequency

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Report No.: AGC05443220916EE17 Page 9 of 32

#### **TEST PROCEDURE:**

The EUT was placed on the top of an insulating table 0.8 meters above the ground at a semi-anechoic chamber.

The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The H-field is measured with a shielded loop antenna connected to a measurement receiver.

The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 Table 11.

The EUT operate with modulation under normal and extreme conditions.

#### **TEST RESULTS:**

Test Mode: Mode 1

#### Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	5.0	Worst case
TL/VL	-10℃	4.5	
TH/VL	45℃	4.5	
TL/VH	-10℃	5.5	
TH/VH	45℃	5.5	

#### Test results tested at 3m test sites:

Tool Toolake toolog at on tool electrical					
Freq.	Antenna Factor	Reading Level	Corrected Level	Limit	
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)	
0.1608	23.53	-0.22	23.31	26.20	

#### Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1608	23.53	-31.42	-7.89	-5.00



Page 10 of 32

Test Mode: Mode 3

#### Extreme conditions state

	_		
conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	5.0	Worst case
TL/VL	-10℃	4.5	
TH/VL	<b>45</b> ℃	4.5	
TL/VH	-10℃	5.5	
TH/VH	45℃	5.5	

#### Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1446	23.53	2.59	26.12	62.40

#### Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1446	23.53	-28.61	-5.08	31.20



Page 11 of 32

Test Mode: Mode 4

#### Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	<b>25</b> ℃	5.0	Worst case
TL/VL	-10℃	4.5	
TH/VL	<b>45</b> ℃	4.5	
TL/VH	<b>-10</b> ℃	5.5	
TH/VH	<b>45</b> ℃	5.5	

#### Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1252	23.53	1.61	25.14	96.27
0.1473	23.53	2.53	26.06	68.90
0.1594	23.53	-8.42	15.11	26.20

#### Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1252	23.53	-29.59	-6.06	65.07
0.1473	23.53	-28.67	-5.14	37.70
0.1594	23.53	-39.62	-16.09	-5.00

#### Remark:

(1) Corrected Level (dBuA/m) = Reading Level + Antenna Factor

(2) For the calculated method, please refer to Annex F at EN 300330.

(3) All extreme conditions were considered for test, but only record the worst case.




Page 12 of 32

#### **5.2 OPERATING FREQUENCY RANGES**

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024

#### **TEST SETUP:**

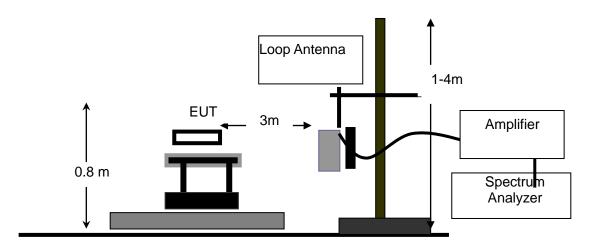

#### **TEST PROCEDURE:**

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by normal signal,
- 3).Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5kHz, Detector=RMS. The 99 % OBW function shall be used to determine the operating frequency range, fH is the frequency of the upper marker resulting from the OFR, fL is the frequency of the lower marker resulting from the OFR.
- 4), Both normal test condition and extreme test condition applied

#### **LIMITS**

The operating frequency range for emissions shall be within one of the following limits: 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz.



Page 13 of 32

#### **TEST RESULT**

Test Mode: Mode 1

# Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit
-10℃	5.5	160.563	161.040	100kHz≤&≤300kHz
-100	4.5	160.561	161.041	100kHz≤&≤300kHz
25℃	5.0	160.559	161.042	100kHz≤&≤300kHz
45℃	5.5	160.560	161.041	100kHz≤&≤300kHz
45 (	4.5	160.562	161.040	100kHz≤&≤300kHz
OFR		0.483kHz		
Results PASS			ASS	

Test Mode: Mode 3

# Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit
-10℃	5.5	144.117	145.085	100kHz≤&≤300kHz
-10 C	4.5	144.116	145.081	100kHz≤&≤300kHz
25℃	5.0	144.115	145.086	100kHz≤&≤300kHz
45℃	5.5	144.116	145.083	100kHz≤&≤300kHz
450	4.5	144.119	145.084	100kHz≤&≤300kHz
OFR		0.971kHz		
Result	s	PASS		



Page 14 of 32

Test Mode: Mode 4

# Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit
10°C	5.5	124.719	159.880	100kHz≤&≤300kHz
-10°C	4.5	124.721	159.877	100kHz≤&≤300kHz
25℃	5.0	124.718	159.881	100kHz≤&≤300kHz
<b>45</b> ℃	5.5	124.719	159.876	100kHz≤&≤300kHz
45 (	4.5	124.722	159.876	100kHz≤&≤300kHz
OFR		35.163kHz		
Results PASS			ASS	

**NOTE:** All the modes had been tested, but only the worst data recorded in the report.




Page 15 of 32

# 5.3 TRANSMITTER OUT OF BAND (OOB) EMISSIONS

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
Power amplifer	AR	75A250	18464	N/A	N/A
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024

#### **TEST SETUP:**

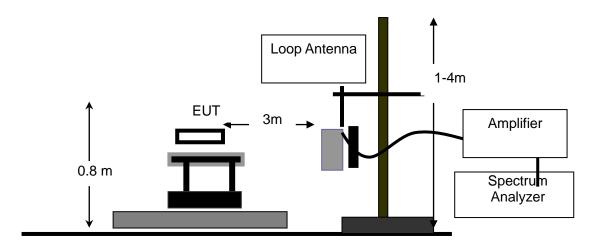

#### **TEST PROCEDURE:**

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by normal signal,
- 3).Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5KHz, Detector=RMS. The 99 % OBW function shall be used to determine the operating frequency range, fH is the frequency of the upper marker resulting from the OFR, fL is the frequency of the lower marker resulting from the OFR.
- 4), Both normal test condition and extreme test condition applied



#### **LIMITS**

The OOB limits are visualized in figures; they are descending from the intentional limits from Table 3 at fH/fL with 10 dB/decade.

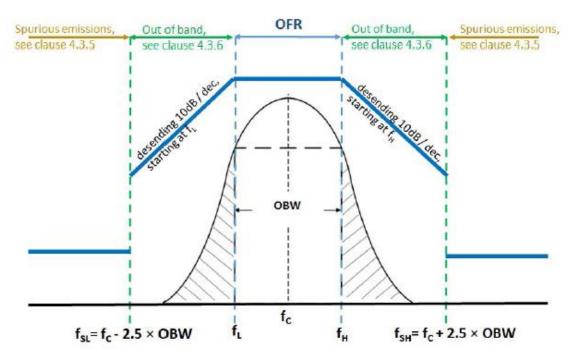


Figure 4: Out of band and spurious domain of a single frequency WPT system

# TEST RESULT Test Mode: Mode 1

Frequency range (KHz)		Maximum level @10m (dBuA/m)	Limit @ 10m (dBuA/m)	Result
fSL -fL	159.593 to 160.559	Less than -17.05	See figure 4	Pass
fL	160.559	-17.05	-5.00	Pass
fH	161.042	-17.57	-5.00	Pass
fH - fSH	161.042 to 162.008	Less than -17.57	See figure 4	Pass

Test Mode: Mode 3

Freque	Frequency range (KHz)		Limit @ 10m (dBuA/m)	Result
fSL-fL	142.173 to 144.115	Less than -14.24	See figure 4	Pass
fL	144.115	-14.24	31.20	Pass
fH	145.086	-14.76	31.20	Pass
fH-fSH	145.086 to 147.028	Less than -14.76	See figure 4	Pass



Page 17 of 32



Page 18 of 32

Test Mode: Mode 4

Frequ	ency range (KHz)	Maximum level @10m (dBuA/m)	Limit @ 10m (dBuA/m)	Result
fSL-fL	122.79 to 124.718	Less than -15.22	See figure 4	Pass
fL	124.718	-15.22	65.07	Pass
fH	159.881	-25.77	-5.00	Pass
fH-fSH	159.881 to 161.803	Less than -25.77	See figure 4	Pass

NOTE: All the modes had been tested, but only the worst data recorded in the report.



Page 19 of 32


#### **5.4 TRANSMITTER SPURIOUS EMISSIONS**

#### **MEASUREMENT EQUIPMENT USED:**


NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
Power amplifer	AR	75A250	18464	N/A	N/A
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 08, 2021	Jan. 07, 2023

#### **TEST SETUP:**

FREQUENCY RANGE (9KHZ-30MHZ)

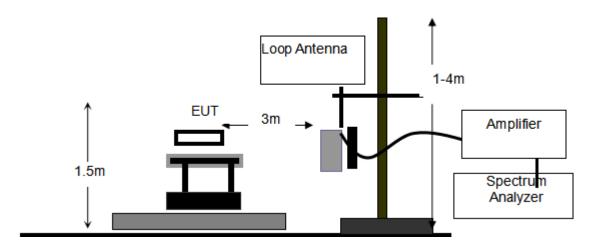

# FREQUENCY RANGE (ABOVE 30MHZ)

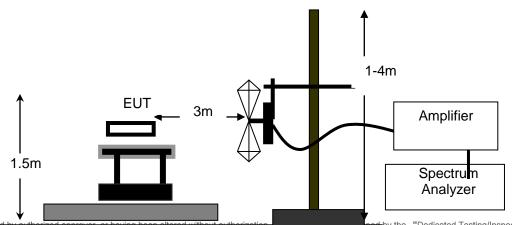




Page 20 of 32

#### **SUBSTITUTION METHOD:**

#### **RADIATED BELOW 1GHZ**

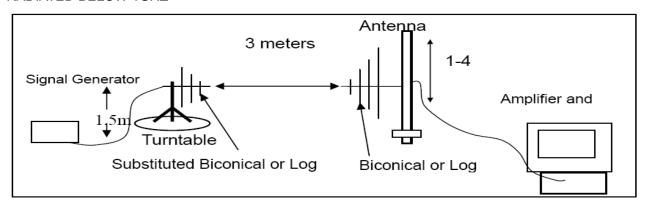

#### **TEST PROCEDURE:**

For test method of frequency range (9kHz-30MHz)

The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The H-field is measured with a shielded loop antenna connected to a measurement receiver.

The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 Table 1.

For test method of frequency range (30 MHz-1000MHz)

EUT was placed on a 1.5m height wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.

The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produce a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB EIRP or ERP, correcting for substitution antenna gain at each frequency.



Page 21 of 32

#### **LIMITS OF RADIATED DISTURBANCES**

Below 30MHz

#### Table 4

State (see note)		Frequency 9 kHz ≤ f < 10 MHz	Frequency 10 MHz ≤ f < 30 MHz	
Operating		27 dBμA/m at 9 kHz descending	-3,5 dBμA/m	
		10 dB/dec		
Standby		5,5 dBμA/m at 9 kHz descending	-25 dBμA/m	
		10 dB/dec		
NOTE:	"Operating	g" means mode 2, 3 and 4 according to Ta	able 2; "standby" means mode 1	
	according	to Table 2.	-	

ABOVE 30MHz

#### Table 5

State (see note)	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies between 30 MHz to 1 000 MHz			
Operating	4 nW	250 nW			
Standby	2 nW	2 nW			
NOTE: "Operating" means mode 2, 3 and 4 according to Table 2; "standby" means mode 1 according to					
Table 2.	_				



Page 22 of 32

#### **TEST LIMITS & RESULT**

**Test Mode: Mode 3** 

FREQUENCY RANGE (9KHZ-30MHZ)

	Operation Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin						
(MHz)	(dB µA)	(dB/m )	(dB µA/m)	(dBµA/m)	(dBµA/m)						
0.061	-8.07	-7.96	-16.03	18.68	34.71						
0.226	-11.29	-7.96	-19.25	13.00	32.25						
0.553	-12.53	-7.96	-20.49	9.11	29.60						
1.961	-14.47	-3.98	-18.45	3.62	22.06						
3.325	-13.03	-3.09	-16.12	1.32	17.44						
4.372	-12.64	-1.25	-13.89	0.14	14.02						

#### Remark:

- (1) Corrected Power (dBm)= Total Factor + Reading Level
- (2) Measuring frequencies from 9KHz to the 30MHz.

Data of measurement within this frequency range shown " -- " in the table above means the

reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 23 of 32

# FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
65.73	31.13	V	-59.33	0.03	-3.30	-62.66	-54.00	8.66
136.96	28.84	V	-65.03	0.05	0.00	-65.08	-36.00	29.08
355.40	31.34	V	-68.13	0.25	6.15	-62.24	-36.00	26.24
425.22	27.48	V	-72.91	0.33	7.00	-66.24	-36.00	30.24
627.21	28.81	V	-71.54	0.51	7.18	-64.87	-54.00	10.87
756.36	28.01	V	-70.77	0.61	6.40	-64.98	-36.00	28.98
107.62	30.19	Н	-64.81	0.04	1.04	-63.81	-54.00	9.81
156.47	27.53	Н	-66.39	0.06	0.80	-65.65	-36.00	29.65
352.80	29.27	Н	-69.82	0.25	5.76	-64.31	-36.00	28.31
431.83	27.29	Н	-73.35	0.34	6.83	-66.86	-36.00	30.86
631.69	29.41	Н	-69.93	0.52	7.28	-63.17	-54.00	9.17
728.12	27.48	Н	-70.84	0.59	6.70	-64.73	-36.00	28.73

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Page 24 of 32

# Test Mode: Mode 4(The low channel is the worst case) FREQUENCY RANGE (9KHZ-30MHZ)

	Operation Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin						
(MHz)	(dB μA)	(dB/m )	(dB μA/m)	(dBµA/m)	(dBµA/m)						
0.024	-8.01	-7.96	-15.97	22.77	38.74						
0.225	-11.29	-7.96	-19.25	13.03	32.28						
0.632	-12.73	-7.96	-20.69	8.54	29.23						
2.257	-14.49	-3.98	-18.47	3.01	21.48						
2.680	-13.34	-3.09	-16.43	2.26	18.70						
3.230	-12.69	-1.25	-13.94	1.45	15.39						

#### Remark:

- (1) Corrected Power (dBm) = Total Factor + Reading Level
- (2) Measuring frequencies from 9KHz to the 30MHz.
- Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 25 of 32

# FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
62.24	32.00	V	-57.10	0.03	-4.44	-61.57	-54.00	7.57
156.73	28.68	V	-65.20	0.06	0.80	-64.46	-36.00	28.46
354.06	31.48	V	-68.32	0.25	6.02	-62.55	-36.00	26.55
427.18	27.69	V	-72.27	0.33	6.96	-65.64	-36.00	29.64
626.87	28.75	V	-72.01	0.51	7.14	-65.39	-54.00	11.39
757.95	27.90	V	-70.41	0.61	6.45	-64.57	-36.00	28.57
132.82	31.56	Н	-62.31	0.05	0.06	-62.30	-36.00	26.30
153.74	27.82	Н	-65.71	0.06	0.70	-65.07	-36.00	29.07
352.56	29.92	Н	-68.95	0.25	5.76	-63.44	-36.00	27.44
433.55	26.89	Н	-72.45	0.34	6.69	-66.11	-36.00	30.11
631.32	29.94	Н	-69.39	0.52	7.28	-62.62	-54.00	8.62
726.87	27.66	Н	-70.91	0.59	6.60	-64.90	-36.00	28.90

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Page 26 of 32

**Test Mode: Mode 1** 

FREQUENCY RANGE (9KHZ-30MHZ)

	Standby Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin						
(MHz)	(dB μA)	(dB/m )	(dB μA/m)	(dBµA/m)	(dBµA/m)						
0.052	-7.68	-7.96	-15.64	-2.14	13.50						
0.251	-10.50	-7.96	-18.46	-8.95	9.51						
0.575	-11.22	-7.96	-19.18	-12.55	6.63						
1.767	-23.17	-3.98	-27.15	-17.43	9.72						
3.135	-28.07	-3.09	-31.16	-19.92	11.24						
4.320	-26.50	-1.25	-27.75	-21.31	6.44						

#### Remark:

- (1) Corrected Power (dBm) = Total Factor + Reading Level
- (2) Measuring frequencies from 9KHz to the 30MHz.
- Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 27 of 32

# FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
74.21	31.62	V	-59.57	0.03	-1.26	-60.86	-36.00	24.86
167.25	28.04	V	-66.31	0.06	1.76	-64.61	-36.00	28.61
353.18	30.56	V	-68.19	0.25	5.89	-62.55	-36.00	26.55
426.84	27.88	V	-72.32	0.33	6.98	-65.67	-36.00	29.67
627.06	28.58	V	-70.69	0.51	7.18	-64.02	-54.00	10.02
760.93	27.53	V	-71.58	0.61	6.60	-65.59	-36.00	29.59
139.57	30.75	Н	-62.18	0.05	0.00	-62.23	-36.00	26.23
223.64	26.89	Н	-74.72	0.10	7.60	-67.21	-54.00	13.21
353.08	28.24	Н	-71.57	0.25	5.89	-65.93	-36.00	29.93
430.99	26.34	Н	-72.52	0.34	6.90	-65.96	-36.00	29.96
629.18	28.87	Н	-70.73	0.51	7.26	-63.98	-54.00	9.98
729.07	28.24	Н	-72.04	0.59	6.75	-65.88	-36.00	29.88

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.




Page 28 of 32

#### 5.5 RECEIVER BLOCKING

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
MXG X-Series Vector Signal Generator	Agilent	N5182B	MY53050647	Aug. 03, 2022	Aug. 02, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Clamp meter	PROVA	PROVA-11	17200101	Sep. 12, 2022	Sep. 13, 2023

#### **TEST SETUP:**

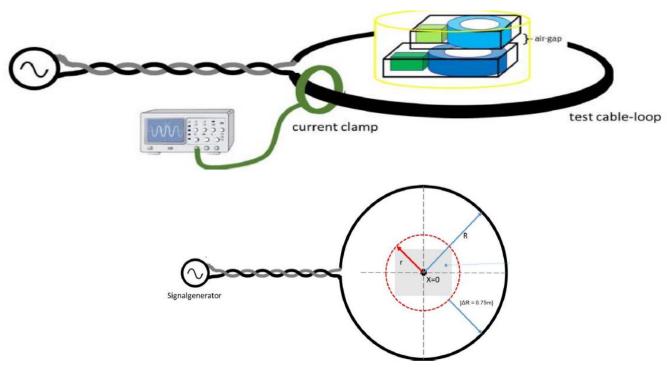

#### **TEST PROCEDURE:**

- 1). The test shall be carried out inside a test chamber according to clauses C.1.1 and C.1.2 in ETSI EN 300 330
- 2). A test loop with a radius r shall be used to create the magnetic field; the test loop shall lie on a non-metallic ground and the minimum distance to metallic objects (e.g. ground plane) shall be 0,75 m.The EUT shall be placed to the centre of the test-loop
- 3). The test loop shall be sufficiently large so that the test loop itself does not influence the WPT system; The radius R of the test-loop shall be in minimum  $\Delta R = 0.75$  m larger than the maximum dimension r of the EUT.

$$R >= r + \Delta R$$
.

The maximum H-Field can be calculated from the loop current I (into the test-loop) with the following formula:

H=I/2R



Report No.: AGC05443220916EE17 Page 29 of 32

4)The required output current to achieve the required magnetic field at the WPT system shall be generated with a signal generator (unmodulated signal) at the test frequencies. For each test frequency the "reaction" of the device shall be recorded and checked against the performance criterion

#### **LIMITS**

The EUT shall achieve the wanted performance criterion, in the presence of the blocking signal.

Table 6: Receiver blocking limits

	In-band signal	OOB signal	Remote-band signal
Frequency	Centre frequency (f <sub>c</sub> ) of the WPT	f = f <sub>c</sub> ± F (see note)	$f = f_c \pm 10 \times F$ (see note)
	system (see clause 4.3.3)		
Signal level field strength at	72 dBµA/m	72 dBµA/m	82 dBµA/m
the EUT	-	-	-
NOTE: F = OFR see clause	4.3.3.		

#### **TEST RESULT**

Test Mode: Mode 1

Test I	Frequency(KHz)	Signal level @ EUT	Performance	Result
In-band signal	160.800	72dBuA/m	No function loss	Pass
OOB signal	160.317	72dBuA/m	No function loss	Pass
002 digital	161.283	72dBuA/m	No function loss	Pass
Remote-band	155.970	82dBuA/m	No function loss	Pass
signal	165.630	82dBuA/m	No function loss	Pass

Test Mode: Mode 3

Test Frequency(KHz)		Signal level @ EUT	Performance	Result
In-band signal	144.600	72dBuA/m	No function loss	Pass
OOB signal	143.629	72dBuA/m	No function loss	Pass
OOB signal	145.571	72dBuA/m	No function loss	Pass
Remote-band	134.890	82dBuA/m	No function loss	Pass
signal	154.310	82dBuA/m	No function loss	Pass




Page 30 of 32

#### 6. INTERPRETATION OF MEASUREMENT RESULTS

All the measurement equipments and accessories have been carefully selected to meet the maximum measurement uncertainty specified below:

RF Frequency	± 1 x 10 <sup>-7</sup>
RF Power, Conducted	± 0.75dB
Maximum Frequency Deviation: _ Within 300Hz and 6KHz of Audio Frequency _ Within 6KHz and 25KHz of Audio Frequency	± 5% ± 3dB
Adjacent channel power	± 3dB
Conducted Emission of Transmitter, Valid Up to 12.75GHz	± 4dB
Conducted Emissions of Receivers	± 3dB
Radiated Emission of Transmitter, Valid Up to 12.75GHz	± 6dB

P.S. Uncertainty figures are valid to confidence level of 95% calculated according to the methods described in the ETSI TR 100 028.





**APPENDIX A: PHOTOGRAPHS OF TEST SETUP** 







Page 32 of 32

#### APPENDIX B: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC05443220916AP01

----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.



# **Health Test Report**

Report No.: AGC05443220916EH02

**PRODUCT DESIGNATION**: wireless charger with phone stand

**BRAND NAME** : N/A

MODEL NAME : M06823

**APPLICANT**: MID OCEAN BRANDS B.V

**DATE OF ISSUE** : Sep. 23, 2022

**STANDARD(S)** : EN IEC 62311:2020

EN 50665:2017

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.





Page 2 of 13

#### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 23, 2022	Valid	Initial release



Page 3 of 13

#### **TABLE OF CONTENTS**

1. GENERAL INFORMATION	
2. TECHNICAL INFORMATION	Į.
3. EN 62311 RF EXPOSURE MEASUREMENT	
3.1 INTRODUCTION	
4. TEST EQUIPMENT LIST	9
5. EUT OPERATION CONDITION	9
6. TEST RESULT	10
7. CONCLUSION	10
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	11



Page 4 of 13

### 1. GENERAL INFORMATION

Applicant	MID OCEAN BRANDS B.V
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Manufacturer	MID OCEAN BRANDS B.V
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Factory	MID OCEAN BRANDS B.V
Address	7/F, Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong
Product Designation	wireless charger with phone stand
Brand Name	N/A
Test Model	MO6823
Date of test	Sep. 14, 2022 to Sep. 22, 2022
Test Result	Pass

We (AGC), Attestation of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements set forth in the European Standard EN IEC 62311:2020. The results of testing in this report apply to the product/system which was tested only.

Prepared By	Bibo thay	
	Bibo Zhang (Project Engineer)	Sep. 23, 2022
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Sep. 23, 2022
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Sep. 23, 2022



Page 5 of 13

### 2. TECHNICAL INFORMATION

Note: the following data is based on the information by the applicant.

Product Designation	wireless charger with phone stand
Brand Name	N/A
Test Model	MO6823
Hardware Version	BM3016C-RZ-V1.0
Software Version	V1.0
Operation Frequency	110KHz-205KHz
Modulation type	ASK
Antenna Type	Coil Antenna
Antenna Gain	0dBi
Power Supply	DC 5V by adapter
Input Rating	DV 5V/2A, DC 9V/1.67A
Output Rating	DC 5V/1A, DC 9V/1.12A, DC 9V/1.67A (15W)
Wireless Charging Output Power	15W(max 15W)

Note: For more details, please refer to the user's manual of the EUT.



Page 6 of 13

# 3. EN 62311 RF EXPOSURE MEASUREMENT

#### 3.1 INTRODUCTION

This International Standard applies to electronic and electrical equipment for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.

This generic standard applies to electronic and electrical apparatus for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.

The frequency range covered is 0 Hz to 300 GHz.

The object of this generic standard is to provide assessment methods and criteria to evaluate such equipment against basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields and induced and contact current.

**NOTE**: This standard is intended to cover both intentional and non-intentional radiators. If the equipment complies with the requirements in another relevant standard, e.g. EN 62479 covering low power equipment, then the requirements of this standard (IEC 62311) are considered to be met and the application of this standard to that equipment is not necessary.



Page 7 of 13

#### 3.2 TEST LIMIT

According to EN IEC 62311:2020, Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz – 300 GHz).

#### Annex F Measurement of E and H field

A commonly used probe size is 100 cm<sup>2</sup>, also the contribution of the three axes X, Y and Z can be evaluated separately.

Reference levels for electric, magnetic and electromagnetic fields (0 Hz to 300 GHz, unperturbed rms values)

Frequency range	E-field strength (V/m)	H-field strength (A/m)	B-field (μΤ)	Equivalent plane wave power density S <sub>eq</sub> (W/m²)
0-1 Hz	_	3,2 × 10 <sup>4</sup>	4 × 10 <sup>4</sup>	_
1-8 Hz	10 000	$3,2 \times 10^4/f^2$	$4 \times 10^{4}/f^{2}$	0 <u></u>
8-25 Hz	10 000	4 000/f	5 000/f	_
0,025-0,8 kHz	250/f	4/f	5/f	_
0,8-3 kHz	250/f	5	6,25	_
3-150 kHz	87	5	6,25	9 <u></u>
0,15-1 MHz	87	0,73/f	0,92/f	-
1-10 MHz	87/f <sup>1/2</sup>	0,73/f	0,92/f	
10-400 MHz	28	0,073	0,092	2
400-2 000 MHz	1,375 f <sup>1/2</sup>	0,0037 f <sup>1/2</sup>	0,0046 f <sup>1/2</sup>	f/200
2-300 GHz	61	0,16	0,20	10




Page 8 of 13

#### 3.3 EVALUATION METHODS

#### Measurement of E and H field

A commonly used probe size is 100 cm<sup>2</sup>, also the contribution of the three axes X, Y and Z can be evaluated separately.

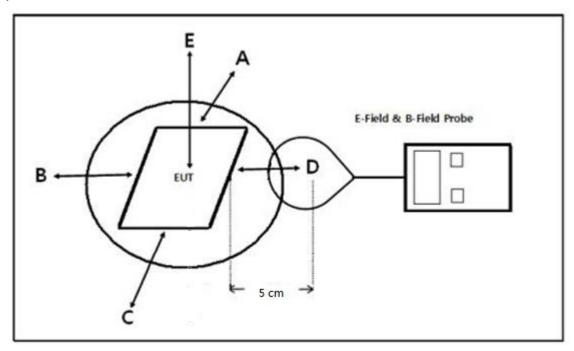

Note: Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT; Position E: Top of EUT

Based on the above standard limit, any device with output power below 5A/m cannot produce an exposure exceeding this restriction under the most pessimistic exposure conditions.



Page 9 of 13

#### 4. TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Broadband Field Meter	WAVECONTROL	SMP2	J-0004	Jun. 08, 2022	Jun. 07, 2023
Probe FHP	WAVECONTROL	WP400	J-0015	Jun. 08, 2022	Jun. 07, 2023

#### 5. EUT OPERATION CONDITION

NO.	TEST MODE DESCRIPTION
1	Full Load Mode
2	Half Load Mode
3	Null Load Mode
Note: 1. The Mode 1 was the worst case and only the data of the worst case record in this report.	



Page 10 of 13

#### 6. TEST RESULT

Frequency (MHz)	Maximum Radiated H-Field at 5cm (A/m)		Limit (A/m)	Result (Pass/Fail)
110kHz-205kHz	position E	0.045	5	Pass
	position A	0.022		
	position B	0.037		
	position C	0.031		
	position D	0.019		

Since Radiated H-Field at worse case is 0.045A/m which cannot exceed the exempt condition, 5A/m. It is deemed to full fit the requirement of RF exposure basic restrisction specified in EC Council Recommendation (1999/519/EC).

#### 7. CONCLUSION


Remark: EUT meets the basic requirements in the standard.



Page 11 of 13

# **APPENDIX I: PHOTOGRAPHS OF TEST SETUP**

WPT Equipment\_ Position E

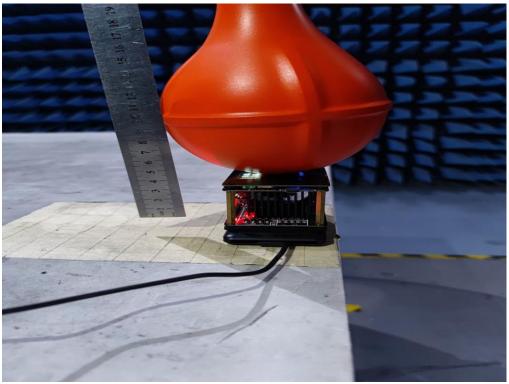


WPT Equipment\_ Position A





Page 12 of 13

# WPT Equipment\_ Position B

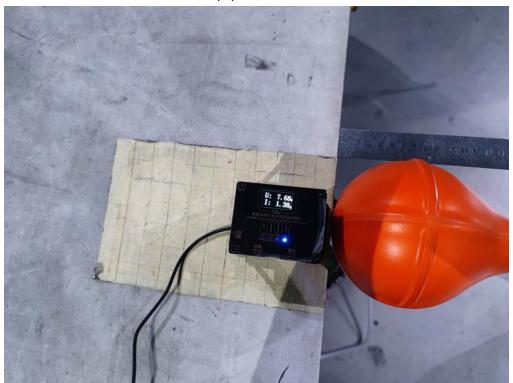


WPT Equipment\_ Position C





Page 13 of 13

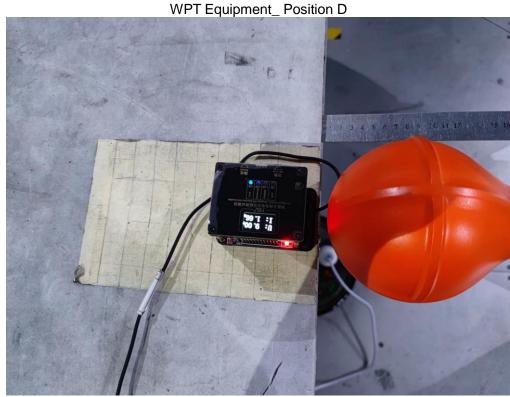

----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.