



TEST REPORT

REPORT No.: **DTI202208015638M**

Date:2022-08-03

Page 1 of 3

Applicant Company Name:

Applicant Company Address

Report on the submitted samples said to be:

Sample Name : Li-ion Polymer Battery
 Model No. : 1160100, 606090, 505573, 906090, 7565121, 1048118, 1165110, 5565110,
 114190, 955565, 1260110, 9060100, 656583, 5758102, 105573, 1165113,
 9373129, 924093, 8870129, 1147126, 1060110
 Sample Receiving Date : August 01, 2022
 Testing Period : From August 01,2022 to August 02,2022
 Results : Please refer to next page(s).

Summary of Test Results:


TEST REQUEST

CONCLUSION

A EU Directive 2013/56/EU on Mercury, Cadmium and Lead Content

Pass

Signed for and on behalf of
DTI

Approved by: 
lab manager



This document is issued by the Company subject to its General Conditions of service of service printed overleaf, available on request for electronic format documents, subject to terms and conditions for electronic documents is drawn to the limitation of liability indemnification and jurisdiction issues defined therein. any holder of this document is advised that information contained hereon reflects the company's findings at the time of its intervention only and within the limits of client's instructions. if any, the company's sole responsibility is to its client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. this document cannot be reproduced except in full, without prior written approval of the company. any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



Deesev Testing International Corp. (Shenzhen)
德泽威技术检测(深圳)有限公司

5/F, 1st Tower of Gaoxinqi High-tech Zone, 67th Zone, Liuxian 1st Road, Bao'an, Shenzhen, Guangdong, China
中国广东省深圳市宝安区留仙一路67区高新奇战略新兴产业园二期1号楼5楼
Tel: +86-755-66683088 Fax: +86-755-66683099



TEST REPORT

REPORT No.: **DTI202208015638M**

Date:2022-08-03

Page 2 of 3

Results:

A. EU Directive 2013/56/EU on Mercury, Cadmium and Lead Content

Test method: With reference to IEC 62321-4:2013 and IEC62321-5:2013.Analysis was performed by inductively coupled plasma atomic emission spectrometer (ICP-AES)

Item	Unit	MDL	Results	Limit (% by weight)
Mercury Content (Hg)	%	0.0001	<0.0001	0.0005
Cadmium Content (Cd)	%	0.0005	<0.0005	0.002 ^{※1}
Lead Content (Pb)	%	0.0005	<0.0005	0.004 ^{※2}
Conclusion	/	/	Pass	/

Remark:

According to EU Directive 2013/56/EU:

※1 = The prohibition not apply to portable batteries and accumulators intended for use in:

- (a) emergency and alarm systems, including emergency lighting;
- (b) medical equipment;
- (c) cordless power tools.

※2 = Batteries accumulators and button cells containing more than 0.0005% Mercury, more than 0.002% Cadmium or more than 0.004% Lead, shall be marked with the chemical symbol for the material concerned: Hg, Cd, Pb. The symbol indicating the heavy metal content shall be printed beneath the symbol shown in Annex II and shall cover an area of at least a quarter the size of that symbol.

Remark:

- mg/kg = ppm
- N.D. = Not detected
- Results shown are of total weight of the battery sample.
- Photo appendix is included.



This document is issued by the Company subject to its General Conditions of service of service printed overleaf, available on request for electronic format documents, subject to terms and conditions for electronic documents is drawn to the limitation of liability indemnification and jurisdiction issues defined therein. any holder of this document is advised that information contained herein reflects the company's findings at the time of its intervention only and within the limits of client's instructions. if any the company's sole responsibility is to its client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. this document cannot be reproduced except in full, without prior written approval of the company. any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. unless otherwise stated the results shown in this test report refer only to the sample(s) tested.





TEST REPORT


REPORT No.: **DTI202208015638M**

Date:2022-08-03

Page 3 of 3

Appendix

Photograph of Sample

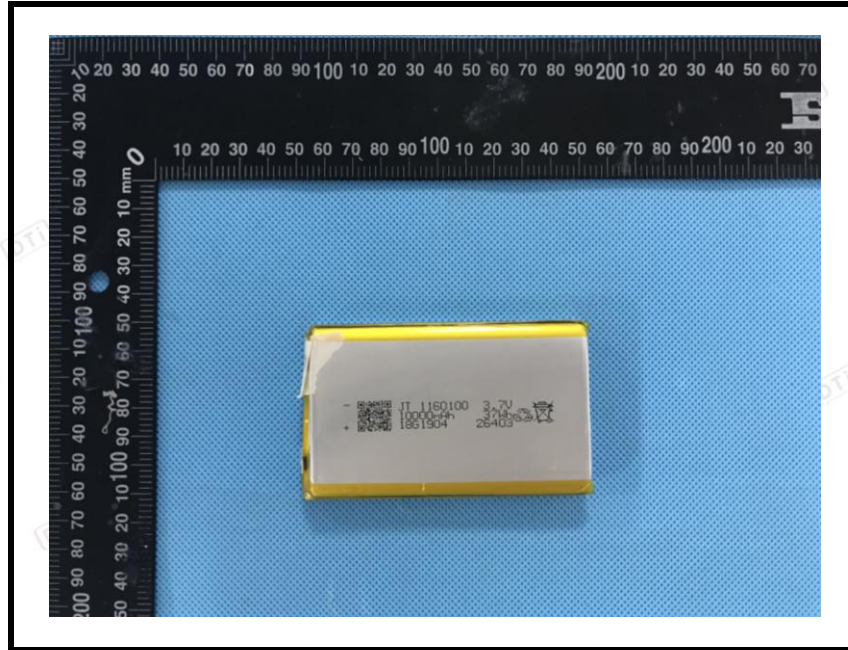

DTI authenticate the photo on original report only

*** End of Report ***



This document is issued by the Company subject to its General Conditions of service of service printed overleaf, available on request for electronic format documents, subject to terms and conditions for electronic documents is drawn to the limitation of liability indemnification and jurisdiction issues defined therein. any holder of this document is advised that information contained herein reflects the company's findings at the time of its intervention only and within the limits of client's instructions. if any the company's sole responsibility is to its client and this document does not exonerate parties to atransaction from exercising all their rights and obligations under the transaction documents. this document cannot be reproduced except in full, without prior written approval of the company. any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



Deesev Testing International Corp. (Shenzhen)
德泽威技术检测(深圳)有限公司

5/F, 1st Tower of Gaoxinqi High-tech Zone, 67th Zone, Liuxian 1st Road, Bao'an, Shenzhen, Guangdong, China
中国广东省深圳市宝安区留仙一路67区高新奇战略新兴产业园二期1号楼5楼
Tel: +86-755-66683088 Fax: +86-755-66683099

**APPLICATION FOR IEC REPORT
On Behalf of**

**Lithium-ion Polymer Cell
Model: 606090P**

Prepared For :

Prepared By : Shenzhen Anbotek Compliance Laboratory
Limited
East of 4/F., Building A, Hourui No.3 Industrial Zone,
Xixiang Street, Bao'an District, Shenzhen, Guangdong,
China
Tel: (86)755-26066061
Fax: (86)755-26066021

Date of Test: Sep. 29, 2022 to Oct. 20, 2022

Date of Report: Oct. 20, 2022

Report Number: R011609930S

<p>TEST REPORT</p> <p>IEC 62133:2012</p> <p>Secondary cells and batteries containing alkaline or other non-acid electrolytes — Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications</p>	
Report	
Reference No.....	: R011609930S
Compiled by (+ signature).....	: Vinson Wu / Project Engineer
Approved by (+ signature).....	: Mark Zhu / Project Manager
Date of issue.....	: Oct. 20, 2022
Contents.....	: 21 pages(including 2 pages of photos)
Testing laboratory	
Name.....	: Shenzhen Anbotek Compliance Laboratory Limited
Address.....	: East of 4/F., Building A, Hourui No.3 Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China
Testing location.....	: Shenzhen Anbotek Compliance Laboratory Limited
Client	
Name.....	:
Address.....	:
Test specification	
Standard.....	: IEC 62133: 2012
Test procedure	: Compliance with IEC 62133: 2012
Procedure deviation.....	: N.A.
Non-standard test method.....	: N.A.
Test item	
Description.....	: Lithium-ion Polymer Cell
Trademark.....	: N.A.
Model and/or type reference.....	: 606090P
Serial number.....	: N.A.
Manufacturer.....	:
Address.....	:
Rating(s).....	: DC 3.7V, 4000mAh

Particulars: test item vs. test requirements Ambient temperature..... : 20 °C ± 5 °C. Battery capacity..... : 4000mAh
Test case verdicts Test case does not apply to the test object..... : N(.A.) Test item does meet the requirement..... : P(ass) Test item does not meet the requirement..... : F(ail)
Testing Date of receipt of test item : Sep. 29, 2022 Date(s) of performance of test..... : Sep. 29, 2022 to Oct. 20, 2022
General remarks This test report shall not be reproduced except in full without the written approval of the testing laboratory. The test results presented in this report relate only to the item tested. "(see remark #)" refers to a remark appended to the report. "(see appended table)" refers to a table appended to the report. Throughout this report a dot is used as the decimal separator. Comments: 1. If no otherwise specified, all tests performed at the model: 606090P 2. Details information for the cell of model 606090P, as following: Dimension: L*W*H(mm): 90.72*59.62*5.97 Weight: 71.936g

General product information with one lithium-ion cell(1S1P),and has overcharge,over discharge, over current and short-circuits proof circuit.

The main features of the cell in the battery are show as below(clause 8.1.1)

Model	Nominal Capacity	Nominal Voltage	Nominal Charge Current	Nominal Discharge Current	Max. Charge Current	Max. Discharge Current	Max. Charge Voltage	Cut-off Voltage
606090P	4000mAh	3.7V	800mA	800mA	4000mAh	4000mAh	4.2V	3.0V

The main features of the cell in the battery are show as below(clause 8.1.2)

Model	Upper limit Charge Voltage	Taper-off Current	Lower Charge temperature	Upper Charge temperature
606090P	4.25V	200mA	10°C	45°C

Copy of marking:

Lithium-ion Polymer Cell
Model number: 606090P
ICP6/60/91
3.7Vdc, 4000mAh, 14.8Wh
(+), (-),

2022.06.01
CAUTION

- Do not disassemble or modify
- Do not short-circuit
- Do not dispose in fire
- Do not expose to high temperature

4	Parameter measurement tolerances		P
	Parameter measurement tolerances		P
5	General safety considerations		P
5.1	General		P
5.2	Insulation and wiring		N
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal case exists.	N
	Insulation resistance (MΩ)..... :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		N
	Orientation of wiring maintains adequate creepage and clearance distances between conductors		N
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		N
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Venting mechanism exists on the narrow side of pouch cell.	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N
5.4	Temperature/voltage/current management		N
	Batteries are designed such that abnormal temperature rise conditions are prevented	Overcharge, over discharge, over current and short-circuit proof circuit used in this battery. See tests of clause 8.	N
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	See above.	N
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that associated chargers are designed to maintain charging within the temperature, voltage and current limits specified	The charging limits specified in the user manual.	N
5.5	Terminal contacts		N

	Terminals have a clear polarity marking on the external surface of the battery		N
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	DC Connector complied with the requirements.	N
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		N
	Terminal contacts are arranged to minimize the risk of short circuits		N
5.6	Assembly of cells into batteries		N
5.6.1	If there is more than one battery housed in a single battery case, cells used in the assembly of each battery have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		N
	Each battery has an independent control and protection		N
	Manufacturers of cells make recommendations about current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		N
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate separate circuitry to prevent the cell reversal caused by uneven discharges		N
	Protective circuit components are added as appropriate and consideration given to the end-device application		N
	When testing a battery, the manufacturer of the battery provides a test report confirming the compliance according to this standard		N
5.6.2	Design recommendation for lithium systems only		N
	For the battery consisting of a single cell or a single cellblock: - Charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Clause 8.1.2, Table 4; or	Charging voltage: 4.2V, not exceed 4.25V specified in Clause 8.1.2, Table 4.	N
	- Charging voltage of the cell does not exceed the different upper limit of the charging voltage determined through Clause 8.1.2, NOTE 1.		N
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - The voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, by monitoring the voltage of every single cell or the single cellblocks; or		N

	- The voltages of any one of the single cells or single cellblocks does not exceed the different upper limit of the charging voltage, determined through Clause 8.1.2, NOTE 1, by monitoring the voltage of every single cell or the single cellblocks		N
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - Charging is stopped when the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks; or		N
	- Charging is stopped when the upper limit of the different charging voltage, determined through Clause 8.1.2, NOTE 1, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N
5.7	Quality plan		P
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery		P

6	Type test conditions		P
	Tests were made with the number of cells or batteries specified in Table 1 for nickel-cadmium and nickel-metal hydride systems and Table 2 for lithium systems, using cells or batteries that are not more than six months old	Complied. Table 2 for Lithium system.	P
	Unless noted otherwise in the test methods, testing was conducted in an ambient of 20°C ± 5°C.	Tests are carried out at 20°C ± 5°C.	P

7	Specific requirements and tests (nickel systems)		N
7.1	Charging procedure for test purposes	Lithium system.	N
7.2	Intended use		N
7.2.1	Continuous low-rate charging (cells)		N
	Results: No fire. No explosion		N
7.2.2	Vibration		N
	Results: No fire. No explosion. No leakage	(See Table 7.2.2)	N
7.2.3	Moulded case stress at high ambient temperature		N
	Oven temperature (°C)..... :		—
	Results: No physical distortion of the battery casing resulting in exposure if internal components		N
7.2.4	Temperature cycling		N

	Results: No fire. No explosion. No leakage.		N
7.3	Reasonably foreseeable misuse		N
7.3.1	Incorrect installation cell		N
	The test was carried out using: - Four fully charged cells of the same brand, type, size and age connected in series, with one of them reversed; or		N
	- A stabilized dc power supply.		N
	Results: No fire. No explosion..... : (See Table 7.3.1)		N
7.3.2	External short circuit		N
	The cells or batteries were tested until one of the following occurred: - 24 hours elapsed; or		N
	- The case temperature declined by 20% of the maximum temperature rise		N
	Results: No fire. No explosion..... : (See Table 7.3.2)		N
7.3.3	Free fall		N
	Results: No fire. No explosion.		N
7.3.4	Mechanical shock (crash hazard)		N
	Results: No fire. No explosion. No leakage.		N
7.3.5	Thermal abuse		N
	Oven temperature (°C)..... :		—
	Results: No fire. No explosion.		N
7.3.6	Crushing of cells		N
	The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or		N
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N
	The cell is prismatic type and a second set of samples was tested, rotated 90° around longitudinal axis compared to the first set		N
	Results: No fire. No explosion..... : (See Table 7.3.6)		N
7.3.7	Low pressure		N
	Chamber pressure (kPa)..... :		—
	Results: No fire. No explosion. No leakage.		N
7.3.8	Overcharge		N
	Results: No fire. No explosion..... : (See Table 7.3.8)		N
7.3.9	Forced discharge		N

	Results: No fire. No explosion..... :	(See Table 7.3.9)	N
8	Specific requirements and tests (lithium systems)		P
8.1	Charging procedures for test purposes		P
8.1.1	First procedure: This charging procedure applied to tests other than those specified in 8.1.2		P
8.1.2	Second procedure: This charging procedure applied to the tests of 8.3.1, 8.3.2, 8.3.4, 8.3.5, and 8.3.9		P
	If a cell's specified upper and/or lower charging temperature exceeds values for the upper and/or lower limit test temperatures of Table 4, the cells were charged at the specified values plus 5 °C for the upper limit and minus 5 °C for the lower limit	Charge temperature 10-45°C declared.	N
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1)..... :		N
	For a different upper limit charging voltage (i.e. other than for lithium cobalt oxide systems at 4,25 V), the applied upper limit charging voltage and upper limit charging temperatures were adjusted accordingly	Lithium cobalt oxide system only.	N
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1)..... :		N
8.2	Intended use		P
8.2.1	Continuous charging at constant voltage (cells)	Test complied.	P
	Results: No fire. No explosion..... :	(See Table 8.2.1)	P
8.2.2	Moulded case stress at high ambient temperature (battery)		N
	Oven temperature (°C)..... :		—
	Results: No physical distortion of the battery casing resulting in exposure of internal components		N
8.3	Reasonably foreseeable misuse		P
8.3.1	External short circuit (cell)		P
	The cells were tested until one of the following occurred: - 24 hours elapsed; or		N
	- The case temperature declined by 20% of the maximum temperature rise		P
	Results: No fire. No explosion..... :	(See Table 8.3.1)	N
8.3.2	External short circuit (battery)		N

	The batteries were tested until one of the following occurred: - 24 hours elapsed; or		N
	- The case temperature declined by 20% of the maximum temperature rise		N
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		N
	Results: No fire. No explosion..... : (See Table 8.3.2)		P
8.3.3	Free fall		P
	Results: No fire. No explosion.	No fire. No explosion.	P
8.3.4	Thermal abuse (cells)		P
	The cells were held at 130°C ± 2°C for: - 10 minutes; or	Test complied.	P
	- 30 minutes for large cells (gross mass of more than 500 g as defined in IEC 62281)		N
	Oven temperature (°C)..... : 130°C		—
	Gross mass of cell (g)..... : <500g, small cell.		—
	Results: No fire. No explosion.	No fire. No explosion.	P
8.3.5	Crush (cells)		P
	The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or	Test complied..	P
	- An abrupt voltage drop of one-third of the original voltage has been obtained; or		N
	- 10% of deformation has occurred compared to the initial dimension		N
	Results: No fire. No explosion..... : (See Table 8.3.5)		P
8.3.6	Over-charging of battery		N
	Test was continued until the temperature of the outer casing: - Reached steady state conditions (less than 10°C change in 30-minute period); or		N
	- Returned to ambient		N
	Results: No fire. No explosion..... : (See Table 8.3.6)		N
8.3.7	Forced discharge (cells)	Test complied.	P
	Results: No fire. No explosion..... : (See Table 8.3.7)		P
8.3.8	Transport tests	The samples had passed the UN38.3 test by Anbotek, the report number is R011609925B	P

	Manufacturer's documentation provided to show compliance with UN Recommendations on Transport of Dangerous Goods		P
8.3.9	Design evaluation – Forced internal short circuit (cells)	Test complied.	N
	The cells complied with national requirement for.....:	France, Japan, Korea and Switzerland.	—
	The pressing was stopped upon: - A voltage drop of 50 mV has been detected; or		N
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached	400N	N
	Results: No fire.....:	(See Table 8.3.9)	N

9	Information for safety		P
	The manufacturer of secondary cells ensures that information is provided about current, voltage and temperature limits of their products.	Cell specifications provided.	P
	The manufacturer of batteries ensures that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards.	Battery pack specifications provided.	P
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N
	As appropriate, information relating to hazard avoidance resulting from a system analysis is provided to the end user.....:		N

10	Marking		P
10.1	Cell marking		N
	Cells marked as specified in the applicable cell standards: IEC 61951-1, IEC 61951-2 or IEC 61960.	The final product is battery.	N
10.2	Battery marking		P
	Batteries marked in accordance with the requirements for the cells from which they are assembled.	See marking plate on page 5.	P
	Batteries marked with an appropriate caution statement.		P
10.3	Other information		P
	Storage and disposal instructions marked on or supplied with the battery.		N

	Recommended charging instructions marked on or supplied with the battery.	Information for recommended charging instructions mentioned in manufacturer's specifications.	P
--	---	---	---

11	Packaging		P
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants.		P

Annex A	Charging range of secondary lithium ion cells for safe use		P
A.1	General		P
A.2	Safety of lithium-ion secondary battery	Complied.	P
A.3	Consideration on charging voltage	Complied.	P
A.3.1	General	Charging voltage is 4.2V	P
A.3.2	Upper limit charging voltage	4.25V	P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied	4.25V applied.	N
A.4	Consideration of temperature and charging current		P
A.4.1	General		P
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature declared by client is: 10-45°C	N
A.4.3	High temperature range	Not higher than the temperature range specific in this standard.	N
A.4.3.1	General		N
A.4.3.2	Explanation of safety viewpoint		N
A.4.3.3	Safety considerations when specifying charging conditions in high temperature range		N
A.4.3.4	Safety consideration when specifying new upper limit in high temperature range		N
A.4.4	Low temperature range	Not lower than the temperature range specific in this standard.	N
A.4.4.1	General		N
A.4.4.2	Explanation of safety viewpoint		N

A.4.4.3	Safety considerations, when specifying charging conditions in low temperature range		N
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		N
A.4.5	Scope of the application of charging current		P
A.5	Sample preparation		P
A.5.1	General		P
A.5.2	Insertion procedure for nickel particle to generate internal short		P
	The insertion procedure carried out at 20°C±5°C and under -25 °C of dew point		P
A.5.3	Disassembly of charged cell		P
A.5.4	Shape of nickel particle		P
A.5.5	Insertion of nickel particle to cylindrical cell		N
A.5.5.1	Insertion of nickel particle to winding core		N
A.5.5.2	Mark the position of nickel particle on the both end of winding core of the separator		N
A.5.6	Insertion of nickel particle to prismatic cell		P

TABLE: List of critical components					P
Object/part No.	Manufacturer/ trademark	Type/model	Technical data	Standard (Edition / year)	Mark(s) of conformity ¹⁾
Cell		606090P	DC 3.7V, 4000mAh	IEC 62133:2012	Test with appliance

1) An asterisk indicates a mark which assures the agreed level of surveillance.

8.2.1	TABLE: Continuous charging at constant voltage (cells)				P
Sample No.	Recommended charging voltage V _c , (Vdc)	Recommended charging current I _{rec} , (mA)	OCV at start of test, (Vdc)	Results	
Cell- 01	4.2	800	4.189	No fire or explosion, No leakage	
Cell- 02	4.2	800	4.188		
Cell- 03	4.2	800	4.186		
Cell- 04	4.2	800	4.187		
Cell- 05	4.2	800	4.195		

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.1	TABLE: External short circuit (cell)					P
Sample No.	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, (mΩ)	Maximum case temperature rise ΔT, (°C)	Results	
Charging temperature: 45°C						
Cell- 06	20	4.195	80 ± 20	93.7	No fire or explosion	
Cell- 07	20	4.212	80 ± 20	85.6		
Cell- 08	20	4.203	80 ± 20	98.6		
Cell- 09	20	4.191	80 ± 20	97.4		
Cell- 10	20	4.196	80 ± 20	94.8		
Charging temperature: 10°C						

Cell- 11	20	4.159	80 ±20	82.4	No fire or explosion
Cell- 12	20	4.154	80 ±20	96.8	
Cell- 13	20	4.148	80 ±20	84.9	
Cell- 14	20	4.155	80 ±20	92.3	
Cell- 15	20	4.151	80 ±20	86.5	

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.3	TABLE: Free fall				P
Sample No.	Time	Drop height	OCV at start of test, (Vdc)	OCV at after of test, (Vdc)	Results
Free fall for cell					
Cell- 16	1st	1m	4.166	4.166	No fire or explosion
	2nd	1m	4.166	4.166	
	3rd	1m	4.166	4.166	
Cell- 17	1st	1m	4.163	4.163	
	2nd	1m	4.163	4.163	
	3rd	1m	4.163	4.163	
Cell- 18	1st	1m	4.165	4.165	
	2nd	1m	4.165	4.165	
	3rd	1m	4.165	4.165	

Supplementary information:

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

8.3.4	TABLE: Thermal abuse (cells)				P
Sample No.	OCV at start of test, (Vdc)	Ambient, (°C)	Temperature raised at a rate(°C)	Results	
Charging temperature: 45°C					
Cell- 19	4.206	130±2	5 °C/min ± 2 °C/min	No fire or explosion	
Cell- 20	4.201	130±2	5 °C/min ± 2 °C/min		
Cell- 21	4.211	130±2	5 °C/min ± 2 °C/min		
Cell- 22	4.209	130±2	5 °C/min ± 2 °C/min		
Cell- 23	4.204	130±2	5 °C/min ± 2 °C/min		
Charging temperature: 10°C					
Cell- 24	4.156	130±2	5 °C/min ± 2 °C/min	No fire or explosion	
Cell- 25	4.143	130±2	5 °C/min ± 2 °C/min		
Cell- 26	4.149	130±2	5 °C/min ± 2 °C/min		
Cell- 27	4.154	130±2	5 °C/min ± 2 °C/min		
Cell- 28	4.147	130±2	5 °C/min ± 2 °C/min		
Supplementary information: - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)					

8.3.5	TABLE: Crush (cells)				P
Sample No.	OCV at start of test, (Vdc)	OCV at removal of crushing force, (Vdc)	Width/ diameter of cell before crush, (mm)	Required deformation for crush, (mm)	Results
A prismatic cell was crushed with its longitudinal axis parallel to the flat surfaces of the crushing apparatus. Test only the wide side of prismatic cells					
Charging temperature: 45°C					
Cell- 29	4.202	4.202	20.07	1/10*20.07	No fire or explosion
Cell- 30	4.201	4.200	19.95	1/10*19.95	
Cell- 31	4.198	4.198	20.09	1/10*20.09	
Cell- 32	4.206	4.205	20.04	1/10*20.04	
Cell- 33	4.197	4.197	19.98	1/10*19.98	

Supplementary information: - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)

8.3.7	TABLE: Forced discharge (cells)	P		
Sample No.	OCV before application of reverse charge, (Vdc)	Measured Reverse charge I _r , (mA)	Time for reversed charge, (minutes)	Results
Cell- 39	3.421	4000	90	No fire or explosion
Cell- 40	3.385	4000	90	
Cell- 41	3.394	4000	90	
Cell- 42	3.474	4000	90	
Cell- 43	3.369	4000	90	

Supplementary information: - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)

8.3.8 Table for detail data
1. Altitude simulation

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

2. Thermal test

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

3. Vibration

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

4. Shock

No.	Pre-test		After test		Mass loss (%)	Voltage loss (%)	Whether leakage, venting, disassembly, rupture, fire (Y/N)
	Mass (g)	Voltage (V)	Mass (g)	Voltage (V)			
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Anbotek

Photo Documentation

Photo 1

- front
- rear
- right side
- left side
- top
- bottom
- internal

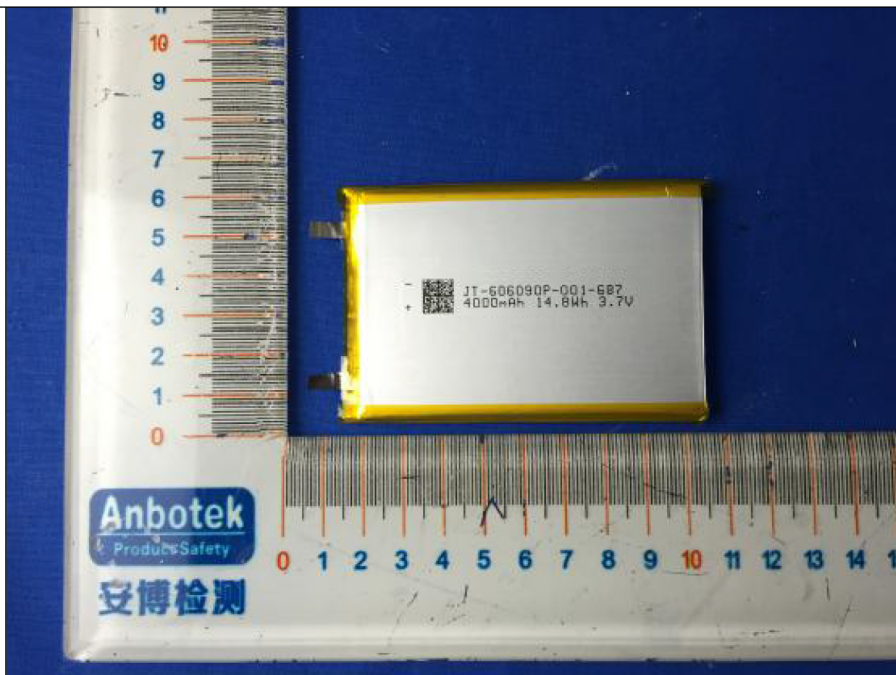


Photo 2

- front
- rear
- right side
- left side
- top
- bottom
- internal

