

TEST REPORT

WTF22F12255286C

Report No.	:
Applicant	\$:
Address	:
Manufacturer	3
Sample Name	:
Sample Model	:
Test Requested	¢.

Test Conclusion	\$.
Date of Receipt sample	5
Testing period	÷
Date of Issue	
Test Result	:
Note	4

Mid Ocean Brands B.V. 7/F., Kings Tower, 111 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong 111025 Refer to next page (s) Refer to next page (s) 1) Client's requirements - BS EN 15284:2007 Materials and article in contact with food stuffs for the resistance to microwave heating of ceramic, glass, glass-ceramic or plastic cookware; 2) Client's requirements - Rapid test for domestic ceramic articles.

Refer to next page (s)

2022-12-19

2022-12-19 to 2022-12-23

Refer to next page (s)

2023-01-03

As specified by client, only test the designated sample.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: No.13-19, 2/F., 2nd Building, Sunlink International Machinery City, Chencun, Shunde District, Foshan, Guangdong, China Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Signed for and on behalf of Waltek Testing Group (Foshan) Co., Ltd.

Swing Liang

Swing.Liang

Waltek Testing Group (Foshan) Co., Ltd. http://www.waltek.com.cn

1/6


WT-F-510-3003-05-A



Report No.: WTF22F12255286C

Specimen No.	Specimen Description	Sample Name	Sample Model	
white ght whe	Transparent glass cup	Set of 2 double wall espresso glasses, Double	MO9720	
politic 10 2 solution	Transparent glass cup	wall glass with bamboo lid 350 ml	M09709	

Sample photo:

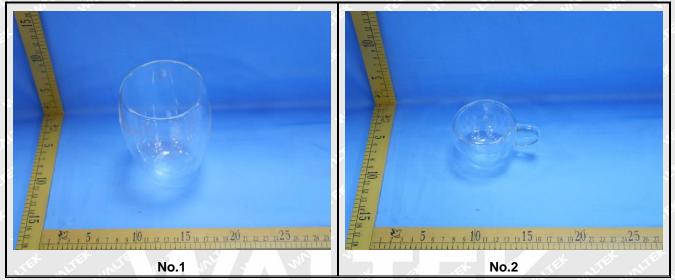



NG (03) RE

Test Result:

Test Standard		BS EN 15284:2007				
		Test Method for the Resistance to Microwave Heating of Ceramic, Glass, Glass-				
	Nr.	Ceramic of Plastic Cookware				
Test Requirement	. A	1. Ceramic items shall display no signs of cracking, crazing, scaling or colour.				
	5	2. Glass, Glass ceramic items shall display no signs of cracking, scaling or colour.				
	*	3. Plastic items shall display no signs of cracking, colour, melting, deformation, suitability for re-use of charring.				
	1	4. The maximum surface temperature of handles (if applicable) after the short period heating shall not exceed:				
	dr's	a. Ceramic, Glass, Glass-ceramic = 56° C				
		b. Plastic = 60°C				
Conclusion(s)	х С	PASS, Details as following				
1. No visible damage	ge wa	as found on all tested samples after testing.				
2. No arcing was ol	oserv	ved on all tested samples during testing.				
3. Surface tempera	ture	at the handle of the tested samples did not exceed the maximum as specified by the				
Standard (see test	data). I st set state with white when when the				

Test Data: Sample No.1

Test Daried		Highes	st Temperatu	Denviroment	
Test Period	Location	Sample 1	Sample 2	Sample 3	Requirement
m. m. m.		4	NUTE UN	1	Ceramic, Glass,
After the Short Period	Handle	1	/	/	Glass-ceramic ≤ 56°C ⊘
heating			15 15	55 5	Plastic ≤ 60 °C
	Surface of body	34.9	53.8	38.8	
After the Long Period heating	Handle	with points	t what a	LIEK AMIE	Ceramic, Glass, Glass-ceramic ≤ 56℃ Plastic ≤ 60℃
white white white	Surface of body	96.3	80.4	96.4	mer with with m

Sample No.2

Test Period	Location	Highe	st Temperatu	Dequirement	
rest Penou	Location	Sample 1	Sample 2	Sample 3	Requirement
After the Short Period Handle heating		23.6	37.6	35.2	Ceramic, Glass, Glass-ceramic ≤ 56℃ Plastic ≤ 60℃
20 21	Surface of body	28.1	50.4	45.7	all an a
After the Long Period	Handle	61.2	72.2	84.9	No requirement
heating	Surface of body	73.2	80.6	90.4	the and when the

Waltek Testing Group (Foshan) Co., Ltd. http://www.waltek.com.cn

3/6



Report No.: WTF22F12255286C

2) Dishwasher safe test (BS EN 12875-4:2006)

Test Standard:	BS EN 12875-4:2006 Mechanical dishwashing resistance of utensils - Part			
	4: Rapid test for domestic ceramic articles			
Procedure:	1. Preparation of test specimens			
	1.1 Remove any surface contamination from the test specimens, e.g. by			
	washing the specimens by hand in a mild liquid detergent at about 45 °C,			
	followed by rinsing and drying with a clean cloth.			
	1.2 Place the test specimens in the inspection site and examine them with			
	normal corrected vision from a distance of (30 ± 10) cm, while the viewing			
	angle is changed. All test specimens of a given type shall be of			
	comparable quality in gloss and colour; discard any specimens that are of			
	inferior quality. Retain one specimen as an untested reference standard.			
	2. Immersion of test specimens			
	2.1 Determine the surface area of the test specimens. Fill the tank with			
	sufficient water to completely cover the specimens. Check for compliance			
	with the surface area to volume criterion; if the calculated surface area			
	approaches the critical limit of 130 cm ² /l, a greater volume shall be used.			
	2.2 Cover the tank and adjust the water bath temperature to give a test			
	tank temperature of (75 ± 1) °C. Record the tank temperature.			
	2.3 Add sufficient detergent to give a 0.5% solution in the test tank. Stir			
	well to disperse the detergent. Immediately lower the test specimens, in			
	the racks, into the tank and cover with the lid.			
	2.4 After 16h \pm 10 min, record the temperature in the tank and remove the			
	test specimens. Rinse the test specimens in hot water and rub dry with a			
	clean cloth (the rubbing action will also remove any loose colour).			
	2.5 Examine the specimens, comparing tested items with the			
	corresponding untested reference standards and report any changes in			
	gloss or colour using the method described in EN 12875-2.			
	2.6 Repeat the immersion procedure for a further 16h ± 10 min using fresh			
	detergent solution. Remove the test specimens, rinse and dry them as			
	described in 2.4.			
and and and	2.7 Re-examine the specimens as described in 2.5 after a total of 32 hours			
Test Result:	Pass			



202

ノシ

Report No.: WTF22F12255286C

Test Result: Sample No.2

en man man a	After	16 hours imn	nersion	After 32 hours immersion		
Test specimen	Gloss	Colour	Other aspects	Gloss	Colour	Other aspects
1.1 5	0	0	0	0	0	- 0 -
J 2 J	0	0	0	J. 1 0 . J. 1	John O John	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
3 - 3	0	1. Our.	0	0	0	
Average	0	0	0	0	0	an 0 an

Note:

Classification	Rating
N 10 10 10	No visible change
the set of the set	first discernible change
2	Clearly visible change

Report No.: WTF22F12255286C



Remarks:

- 1. The results shown in this test report refer only to the sample(s) tested;
- 2. This test report cannot be reproduced, except in full, without prior written permission of the company;
- 3. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver;
- 4. The Applicant name and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which Waltek hasn't verified;
- 5. If the report is not stamped with the accreditation recognized seal, it will only be used for scientific research, education, and internal quality control activities, and is not used for the purpose of issuing supporting data to the society.
- 6. The sample material information (Model No. information) is provided by client, not verified by test laboratory. The samples of reference Model No. are not tested. Test laboratory not responsible for the accuracy, appropriateness, completeness and authenticity of the information provided by client.

===== End of Report ======