

# **RF Test Report**

Report No.: AGC05443240615ER02

**PRODUCT DESIGNATION**: Bamboo weather station

BRAND NAME : N/A

MODEL NAME : MO6665

**APPLICANT** : MID OCEAN BRANDS B.V.

**DATE OF ISSUE** : Jun. 25, 2024

**STANDARD(S)** : ETSI EN 303 417 V1.1.1(2017-09)

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.



Page 2 of 31

# Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Jun. 25, 2024	Valid	Initial Release



Page 3 of 31

#### **TABLE OF CONTENTS**

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST ITEMS	
4. TEST FACILITY	
5. ETSI EN 303 417 REQUIREMENT	7
5.1 TRANSMITTER H-FIELD REQUIREMENTS	7
5.2 OPERATING FREQUENCY RANGES	12
5.3 TRANSMITTER OUT OF BAND (OOB) EMISSIONS	15
5.4 TRANSMITTER SPURIOUS EMISSIONS	
5.5 RECEIVER BLOCKING	27
6. INTERPRETATION OF MEASUREMENT RESULTS	29
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	30
ADDENING B. DUOTOGDADUS OF THE FIIT	21



Report No.: AGC11890240521ER02 Page 4 of 31

# 1. TEST RESULT CERTIFICATION

Applicant	MID OCEAN BRANDS B.V.			
Address	Unit 201 2/F,. Laford Centre,838 Lai Chi Kok Road, Cheung Sha Wan, Kowloon, Hongkong			
Manufacturer	MID OCEAN BRANDS B.V.			
Address	Unit 201 2/F,. Laford Centre,838 Lai Chi Kok Road, Cheung Sha Wan, Kowloon, Hongkong			
Factory	MID OCEAN BRANDS B.V.			
Address	Unit 201 2/F,. Laford Centre,838 Lai Chi Kok Road, Cheung Sha Wan, Kowloon, Hongkong			
Product Designation	Bamboo weather station			
Brand Name	N/A			
Test Model	MO6665			
Series Model(s)	N/A			
Difference Description	N/A			
Date of receipt of test item	Jun. 18, 2024			
Date of test	Jun. 18, 2024 to Jun. 25, 2024			
Deviation	None			
Condition of Test Sample	Normal			
Test Result	Pass			
Report Template	AGCRT-EC-RF			

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jouk bai	
	Jack Gui (Project Engineer)	Jun. 25, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Jun. 25, 2024
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Jun. 25, 2024



Report No.: AGC11890240521ER02 Page 5 of 31

#### 2. EUT DESCRIPTION

Details of technical specification refer to the description in follows:

Hardware Version	V1.0
Software Version	V1.0
Frequency Band	110kHz-205kHz
ocw	Energy transmission: Low channel 0.855kHz, Middle Channel 0.862kHz, High channel 0.874kHz Data communication: 0.732kHz
Test Channels	Energy transmission: Low channel 126.2kHz, Middle Channel 127.8kHz, High channel 128.2kHz Data communication: 113.5kHz
Modulation	ASK
Antenna Type	Coil Antenna
Operational Mode	Mode 1: base station in stand-by, idle mode Mode 3: communication Mode 4: energy transmission
Wireless Charging Input Rating	DC 5V/2A, DC 9.0V/1.67A
Wireless Charging Output Power	5W/10W

**NOTE:** 1. For more information, please refer to User's Manual.

- 2. During the initial establishment of the charging mode (mode 2), no or very low emission occur (below the sensitivity level of the test set-up), so the mode 2 can be assumed as irrelevant for the test.
- 3. Mode 3 and mode 4 have been performed within one set-up, worst-case alignment. But each mode have been tested separately with specific test software.
- 4. The maximum temperature of 40 is not a standard requirement and is measured according to the maximum service temperature stated by the manufacturer.
  - 5. The EUT support 9V voltage input and recorded in this report as the worst case.
  - 6. The communication frequency 113.5 kHz corresponds to the maximum field strength.



Page 6 of 31

#### 3. DESCRIPTION OF TEST ITEMS

	Harmonised Standard ETSI EN 303 417					
	Requirement	Requirement Conditionality				
No	Description	Requirement Conditionality				
1	Permitted range of operating frequencies					
2	Operating frequency ranges					
3	H-field requirements					
4	Transmitter spurious emissions					
5	Transmitter out of band (OOB) emissions					
6	WPT system unwanted conducted emissions	☐ Applicable ☒ Not Applicable				
7	Receiver blocking					

#### 4. TEST FACILITY

Test Site	Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	



Page 7 of 31


### 5. ETSI EN 303 417 REQUIREMENT

# **5.1 TRANSMITTER H-FIELD REQUIREMENTS**

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 01, 2024	Jan. 31, 2025
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026

#### **TEST SETUP:**

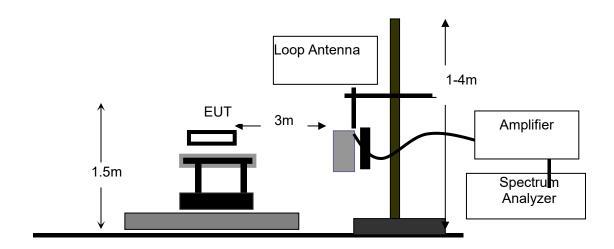



Page 8 of 31

#### **TEST LIMITS:**

The H-field limit in  $dB\mu A/m$  at 3 m,  $H_{3m}$ , is determined by the following equation:

$$H_{3m} = H_{10m} + C_3 (F.2)$$

Where:H<sub>10m</sub> is the H-field limit in dBµA/m at 10 m distance according to the present document; andC<sub>3</sub> is a conversion factor in dB determined from figure F.2.

According to EN 303 417 Tablet 3,

Table 3: H-field limits

Frequency range [MHz]	H-field strength limit [dBµA/m at 10 m]	Comments
0,019 ≤ f < 0,021	72	100
0,059 ≤ f < 0,061	69,1 descending 10 dB/dec above 0,059 MHz	See note 1
0,079 ≤ f < 0,090	67,8 descending 10 dB/dec above 0,079 MHz	See note 2
0,100 ≤ f < 0,119	42	
0,119 ≤ f < 0,135	66 descending 10 dB/dec above 0,119 MHz	See note 1
0,135 ≤ f < 0,140	42	
0,140 ≤ f < 0,1485	37,7	
0,1485 ≤ f < 0,30	-5	
6,765 ≤ f < 6,795	42	e contract to the contract to the

NOTE 1: Limit is 42 dBµA/m for the following spot frequencies: 60 kHz ± 250 Hz and 129,1 kHz ± 500 Hz.
NOTE 2: At the time of preparation of the present document the feasibility of increased limits for high power wireless power transmission systems to charge vehicles [i.4] was prepared. New specific requirements for such systems (e.g. higher H-field emission limits in the 79 - 90 kHz band) will be reflected within a future revision of the present document.

#### Correction factor, C3, for limits at 3 m distance, dB

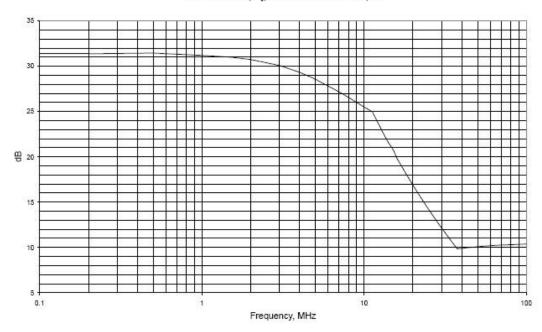


Figure F.2: Conversion factor C<sub>3</sub> versus frequency



Page 9 of 31

#### **TEST PROCEDURE:**

The EUT was placed on the top of an insulating table 0.8 meters above the ground at a semi-anechoic chamber.

The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The H-field is measured with a shielded loop antenna connected to a measurement receiver.

The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 V2.1.1 Table 11.

The EUT operate with modulation under normal and extreme conditions.

#### **TEST RESULTS:**

Test Mode: Mode 1

#### Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	9.00	Worst case
TL/VL	-10℃	8.10	
TH/VL	45℃	8.10	
TL/VH	-10℃	9.90	
TH/VH	45℃	9.90	

#### Test results tested at 3m test sites:

_							
	Freq.	Antenna Factor	Reading Level	Corrected Level	Limit		
	(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)		
	0.1135	23.53	-6.47	17.06	73.20		

#### Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1135	23.53	-37.67	-14.14	42.00



Page 10 of 31

#### Test Mode3:

#### Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	9.00	Worst case
TL/VL	-10℃	8.10	
TH/VL	45℃	8.10	
TL/VH	-10℃	9.90	
TH/VH	45℃	9.90	

#### Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1135	23.53	6.41	29.94	73.20

#### Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1135	23.53	-13.43	10.10	42.00



Page 11 of 31

#### Test Mode: Mode 4:

#### Extreme conditions state

conditions	Test Temp	Test Volt.(V)	Note
TN/VN	25℃	9.00	Worst case
TL/VL	-10℃	8.10	
TH/VL	45℃	8.10	
TL/VH	-10℃	9.90	
TH/VH	45℃	9.90	

#### Test results tested at 3m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1262	23.53	5.41	28.94	96.89
0.1278	23.53	-6.55	16.98	96.89
0.1282	23.53	-7.23	16.30	96.89

#### Test results calculated to 10m test sites:

Freq.	Antenna Factor	Reading Level	Corrected Level	Limit
(MHz)	(dB/m)	(dBuA)	(dBuA/m)	(dBuA/m)
0.1262	23.53	-25.79	-2.26	65.69
0.1278	23.53	-37.75	-14.22	65.69
0.1282	23.53	-38.43	-14.90	65.69

#### Remark:

(1) Corrected Level (dBuA/m) = Reading Level + Antenna Factor

(2) For the calculated method, please refer to Annex F at EN 300330.

(3) All extreme conditions were considered for test, but only record the worst case.




Page 12 of 31

#### **5.2 OPERATING FREQUENCY RANGES**

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 01, 2024	Jan. 31, 2025
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026

#### **TEST SETUP:**

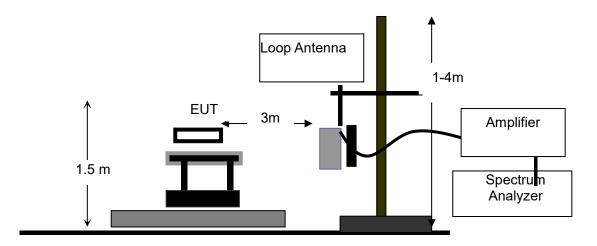

#### **TEST PROCEDURE:**

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by normal signal,
- 3).Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5kHz, Detector=RMS. The 99 % OBW function shall be used to determine the operating frequency range, fH is the frequency of the upper marker resulting from the OFR, fL is the frequency of the lower marker resulting from the OFR.
- 4), Both normal test condition and extreme test condition applied

#### **LIMITS**

The operating frequency range for emissions shall be within one of the following limits: 19 - 21 kHz, 59 - 61 kHz, 79 - 90 kHz, 100 - 300 kHz, 6 765 - 6 795 kHz.



Page 13 of 31

#### **TEST RESULT**

Test Mode: Mode 1

# Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit
-10℃	8.10	113.136	113.864	100kHz≤&≤300kHz
-10 C	9.90	113.137	113.863	100kHz≤&≤300kHz
25℃	9.00	113.132	113.868	100kHz≤&≤300kHz
45℃	8.10	113.136	113.868	100kHz≤&≤300kHz
45 (	9.90	113.132	113.868	100kHz≤&≤300kHz
OF	R	0.736kHz		
Resi	ults	PASS		

Test Mode: Mode 3

# Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(K Hz)	Highest Frequency (KHz)	Limit
-10℃	8.10	113.135	113.861	100kHz≤&≤300kHz
-10 C	9.90	113.139	113.863	100kHz≤&≤300kHz
25℃	9.00	113.134	113.866	100kHz≤&≤300kHz
45℃	8.10	113.135	113.862	100kHz≤&≤300kHz
45 C	9.90	113.136	113.862	100kHz≤&≤300kHz
OF	R	0.732kHz		
Resu	ults	PASS		



Page 14 of 31

Test Mode: Mode 4:

# Frequency Range Test Result

Test Temperature	Test Voltage (V DC)	Lowest Frequency(k Hz)	Highest Frequency (kHz)	Limit
-10℃	8.10	125.776	128.633	100kHz≤&≤300kHz
-10 C	9.90	125.776	128.634	100kHz≤&≤300kHz
25℃	9.00	125.773	128.637	100kHz≤&≤300kHz
45℃	8.10	125.774	128.635	100kHz≤&≤300kHz
45 (	9.90	125.773	128.635	100kHz≤&≤300kHz
OFR 2.864kHz		64kHz		
Resi	ults	PASS		

NOTE: All the modes had been tested, but only the worst data recorded in the report.




Page 15 of 31

# 5.3 TRANSMITTER OUT OF BAND (OOB) EMISSIONS

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 01, 2024	Jan. 31, 2025
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026

#### **TEST SETUP:**

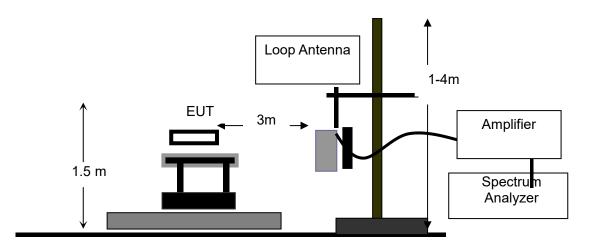

#### **TEST PROCEDURE:**

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by normal signal,
- 3).Set SPA Center Frequency = fundamental frequency, RBW=VBW=200Hz, Span=5kHz, Detector=RMS. The 99 % OBW function shall be used to determine the operating frequency range, fH is the frequency of the upper marker resulting from the OFR, fL is the frequency of the lower marker resulting from the OFR.
- 4), Both normal test condition and extreme test condition applied



#### **LIMITS**

The OOB limits are visualized in figures; they are descending from the intentional limits from Table 3 at fH/fL with 10 dB/decade.

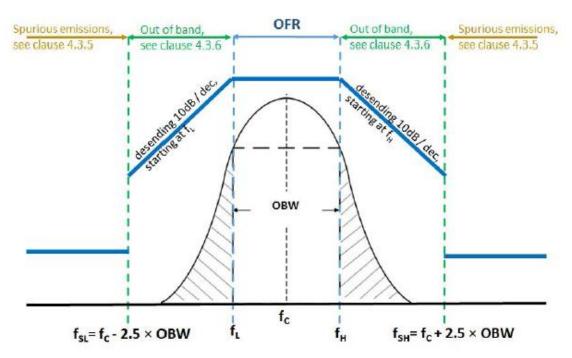


Figure 4: Out of band and spurious domain of a single frequency WPT system

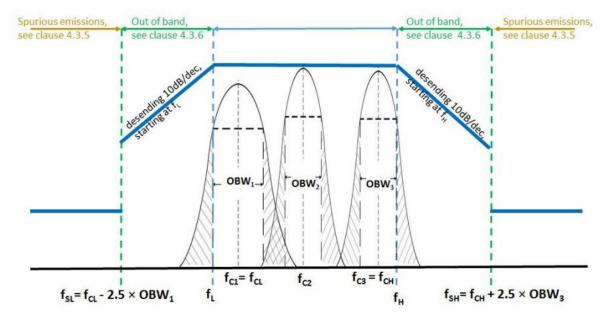


Figure 5: Out of band and spurious domain of a multi - frequency system (during one WPT system cycle time)



Page 17 of 31

# **TEST RESULT**Test Mode: Mode 1

Frequency range (KHz)		Maximum level @10m (dBuA/m)	Limit @ 10m (dBuA/m)	Result
fSL-fL	111.66 to 113.132	Less than -23.3	41.99-42.00	Pass
fL	113.132	-23.30	42.00	Pass
fH	113.868	-23.82	42.00	Pass
fH-fSH	113.868 to 115.34	Less than -23.82	42.00-41.99	Pass

Test Mode: Mode 3:

Frequency range (kHz)		Maximum level @10m (dBuA/m)	Limit @ 10m (dBuA/m)	Result
fSL-fL	111.67 to 113.134	Less than 0.94000000000001	41.99-42.00	Pass
fL	113.134	0.94	42.00	Pass
fH	113.866	0.42	0.42 42.00	
fH-fSH	113.866 to 115.33	Less than 0.420000000000002	42.00-41.99	Pass

Test Mode: Mode 4:

Frequency range (kHz)		Maximum level @10m	Limit @ 10m	Result
Freque	(dBuA/m)		(dBuA/m)	Result
fSL-fL	124.063 to 125.773	Less than -11.42	65.68-65.69	Pass
fL	125.773	-11.42	65.69	Pass
fH	128.637	-24.58	65.69	Pass
fH-fSH	128.637 to 130.385	Less than -24.58	65.69-65.68	Pass

NOTE: All the modes had been tested, but only the worst data recorded in the report.




#### **5.4 TRANSMITTER SPURIOUS EMISSIONS**

#### **MEASUREMENT EQUIPMENT USED:**


NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 01, 2024	Jan. 31, 2025
Power amplifer	AR	75A250	18464	N/A	N/A
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2025

#### **TEST SETUP:**

FREQUENCY RANGE (9kHZ-30MHZ)

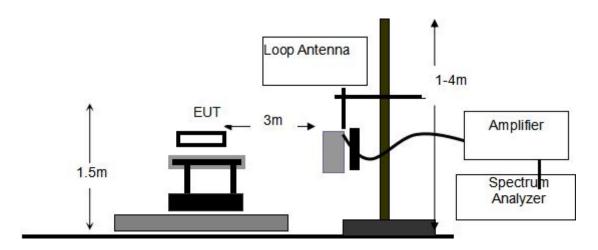

FREQUENCY RANGE (ABOVE 30MHZ)

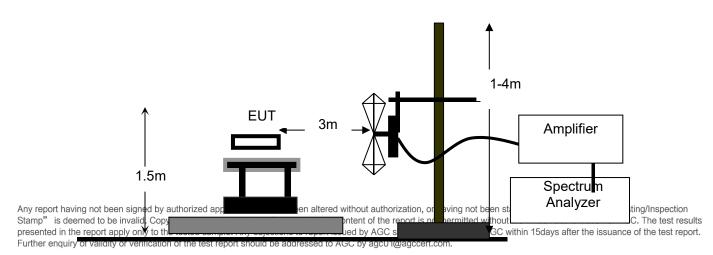


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 19 of 31

#### **SUBSTITUTION METHOD:**

#### **RADIATED BELOW 1GHZ**

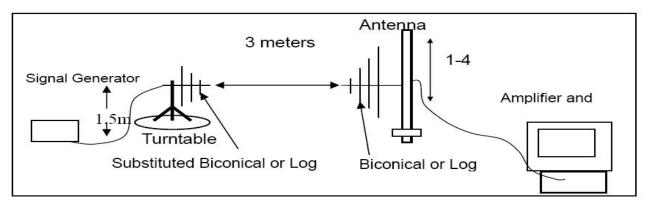

#### **TEST PROCEDURE:**

For test method of frequency range (9kHz-30MHz)

The EUT was placed on the top of an insulating table 1.5 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The H-field is measured with a shielded loop antenna connected to a measurement receiver.

The measuring bandwidth and detector type of the measurement receiver shall be in accordance with EN 300 330 Table 1.

For test method of frequency range (30 MHz-1000MHz)

EUT was placed on a 1.5m height wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.

The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produce a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB EIRP or ERP, correcting for substitution antenna gain at each frequency.



Page 20 of 31

#### **LIMITS OF RADIATED DISTURBANCES**

Below 30MHz

#### Table 4

State (see note)	Frequency 9 kHz ≤ f < 10 MHz	Frequency 10 MHz ≤ f < 30 MHz	
Operating	27 dBμA/m at 9 kHz descending 10 dB/dec	-3,5 dBμA/m	
Standby	5,5 dBμA/m at 9 kHz descending 10 dB/dec	-25 dBμA/m	
	g" means mode 2, 3 and 4 according to Ta to Table 2.	able 2; "standby" means mode 1	

ABOVE 30MHz

#### Table 5

State (see note)	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies between 30 MHz to 1 000 MHz
Operating	4 nW	250 nW
Standby	2 nW	2 nW
NOTE: "Operating" means	mode 2, 3 and 4 according to Table 2;	"standby" means mode 1 according to
Table 2.		2 95 95 95 97 97 97 97 97 97 97 97 97 97 97 97 97



Page 21 of 31

#### **TEST LIMITS & RESULT**

Test Mode: Mode 3:

FREQUENCY RANGE (9kHZ-30MHZ)

	Operation Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin						
(MHz)	(dB µA)	(dB/m )	(dB μA/m)	(dBµA/m)	(dBµA/m)						
0.035	-8.00	-7.96	-15.96	21.15	37.11						
0.234	-11.13	-7.96	-19.09	12.85	31.94						
0.613	-12.60	-7.96	-20.56	8.67	29.22						
2.206	-14.40	-3.98	-18.38	3.11	21.48						
2.475	-13.42	-3.09	-16.51	2.61	19.12						
4.031	-12.81	-1.25	-14.06	0.49	14.55						

#### Remark:

- (1) Corrected Power (dBm)= Total Factor + Reading Level
- (2) Measuring frequencies from 9kHz to the 30MHz.

Data of measurement within this frequency range shown " -- " in the table above means the

reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 22 of 31

#### FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
84.44	30.43	V	-60.07	0.48	0.54	-60.01	-36.00	24.01
130.61	31.20	V	-59.98	0.49	0.10	-60.37	-36.00	24.37
239.84	31.50	V	-64.95	0.52	6.60	-58.87	-36.00	22.87
326.01	30.68	V	-67.50	0.53	6.10	-61.93	-36.00	25.93
335.20	31.24	V	-64.11	0.53	5.90	-58.74	-36.00	22.74
827.88	31.34	V	-66.28	0.66	6.45	-60.49	-36.00	24.49
84.14	31.80	Н	-60.80	0.48	0.54	-60.74	-36.00	24.74
131.74	30.60	Н	-60.69	0.49	0.08	-61.10	-36.00	25.10
242.96	30.32	Н	-68.34	0.52	6.72	-62.14	-36.00	26.14
325.91	30.44	Н	-65.52	0.53	6.10	-59.95	-36.00	23.95
735.71	31.37	Н	-66.11	0.59	6.60	-60.10	-54.00	6.10
827.43	31.51	Н	-63.91	0.66	6.45	-58.11	-36.00	22.11

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Page 23 of 31

# Test Mode: Mode 4(The low channel is the worst case): FREQUENCY RANGE (9kHZ-30MHZ)

	Operation Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin						
(MHz)	(dB µA)	(dB/m )	(dB μA/m)	(dBµA/m)	(dBµA/m)						
0.066	-7.93	-7.96	-15.89	18.35	34.24						
0.310	-11.13	-7.96	-19.09	11.63	30.72						
0.672	-12.67	-7.96	-20.63	8.27	28.90						
2.119	-14.47	-3.98	-18.45	3.28	21.73						
2.267	-13.25	-3.09	-16.34	2.99	19.32						
3.284	-12.78	-1.25	-14.03	1.38	15.41						

#### Remark:

- (1) Corrected Power (dBm) = Total Factor + Reading Level
- (2) Measuring frequencies from 9kHz to the 30MHz.
- Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 24 of 31

#### FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
85.00	30.88	V	-59.76	0.48	0.54	-59.70	-36.00	23.70
130.03	31.04	V	-58.63	0.49	0.10	-59.02	-36.00	23.02
239.66	30.68	V	-64.63	0.52	6.60	-58.55	-36.00	22.55
325.62	30.37	V	-65.62	0.53	6.10	-60.05	-36.00	24.05
334.54	31.44	V	-66.67	0.53	5.94	-61.26	-36.00	25.26
827.12	31.77	V	-65.45	0.66	6.45	-59.65	-36.00	23.65
83.92	31.97	Н	-59.23	0.48	0.38	-59.33	-36.00	23.33
131.51	30.48	Н	-59.16	0.49	0.08	-59.57	-36.00	23.57
243.06	30.14	Н	-68.25	0.52	6.78	-61.99	-36.00	25.99
325.84	31.15	Н	-66.40	0.53	6.10	-60.83	-36.00	24.83
735.20	31.35	Н	-65.33	0.59	6.60	-59.33	-54.00	5.33
828.25	30.96	Н	-64.86	0.66	6.40	-59.12	-36.00	23.12

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Page 25 of 31

**Test Mode: Mode 1:** 

FREQUENCY RANGE (9KHZ-30MHZ)

	Standby Mode										
Frequency	Reading level	Total Factor	Emission level	Limit	Margin						
(MHz)	(dB μA)	(dB/m )	(dB μA/m)	(dBµA/m)	(dBµA/m)						
0.034	-7.47	-7.96	-15.43	-0.28	15.16						
0.303	-10.41	-7.96	-18.37	-9.77	8.60						
0.520	-11.47	-7.96	-19.43	-12.12	7.32						
1.663	-23.44	-3.98	-27.42	-17.17	10.26						
3.998	-28.01	-3.09	-31.10	-20.98	10.13						
4.778	-26.76	-1.25	-28.01	-21.75	6.26						

#### Remark:

- (1) Corrected Power (dBm) = Total Factor + Reading Level
- (2) Measuring frequencies from 9kHz to the 30MHz.
- Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Page 26 of 31

#### FREQUENCY RANGE (ABOVE 30MHZ)

Transmitter Spurious Emission below 1GHz (30MHz-1GHz)

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
85.02	31.10	V	-63.07	0.48	0.70	-62.85	-57.00	5.85
129.68	31.22	V	-64.36	0.49	0.14	-64.71	-57.00	7.71
240.23	30.97	V	-69.57	0.52	6.60	-63.49	-57.00	6.49
326.28	30.45	V	-72.09	0.53	6.10	-66.52	-57.00	9.52
334.36	30.91	V	-69.00	0.53	5.94	-63.59	-57.00	6.59
827.08	31.94	V	-68.60	0.66	6.45	-62.81	-57.00	5.81
83.68	32.07	Н	-64.61	0.48	0.38	-64.71	-57.00	7.71
131.82	30.75	Н	-62.07	0.49	0.08	-62.48	-57.00	5.48
242.50	30.09	Н	-72.61	0.52	6.72	-66.41	-57.00	9.41
325.89	31.21	Н	-68.42	0.53	6.10	-62.85	-57.00	5.85
735.32	30.83	Н	-68.10	0.59	6.60	-62.09	-57.00	5.09
827.34	30.89	Н	-69.35	0.66	6.45	-63.56	-57.00	6.56

Note: 1.The margins of the other spectrum are not exceeding the minimum value of margin, and this part of the results without recording in the test report.

2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "--" remark, if no specific emission from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.




Page 27 of 31

#### **5.5 RECEIVER BLOCKING**

#### **MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	S/N	Cal. Date	Cal. Due
MXG X-Series Vector Signal Generator	Agilent	N5182B	MY53050647	Feb. 01, 2024	Jan. 31, 2025
Active loop antenna(9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 05, 2024	Mar. 04, 2026
Clamp meter	PROVA	PROVA-11	17200101	Sep. 14, 2023	Sep. 13, 2024

#### **TEST SETUP:**

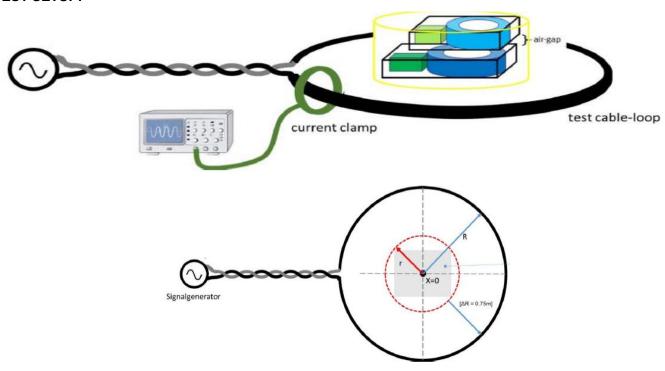

#### **TEST PROCEDURE:**

- 1). The test shall be carried out inside a test chamber according to clauses C.1.1 and C.1.2 in ETSI EN 300 330
- 2). A test loop with a radius r shall be used to create the magnetic field; the test loop shall lie on a non-metallic ground and the minimum distance to metallic objects (e.g. ground plane) shall be 0,75 m.The EUT shall be placed to the centre of the test-loop
- 3). The test loop shall be sufficiently large so that the test loop itself does not influence the WPT system; The radius R of the test-loop shall be in minimum  $\Delta R = 0.75$  m larger than the maximum dimension r of the EUT.

$$R >= r + \Delta R$$
.

The maximum H-Field can be calculated from the loop current I (into the test-loop) with the following formula:

H=I/2R



Page 28 of 31

4)The required output current to achieve the required magnetic field at the WPT system shall be generated with a signal generator (unmodulated signal) at the test frequencies. For each test frequency the "reaction" of the device shall be recorded and checked against the performance criterion

#### **LIMITS**

The EUT shall achieve the wanted performance criterion, in the presence of the blocking signal.

Table 6: Receiver blocking limits

5	In-band signal	OOB signal	Remote-band signal
Frequency	Centre frequency (f <sub>c</sub> ) of the WPT	$f = f_c \pm F$ (see note)	$f = f_c \pm 10 \times F$ (see note)
	system (see clause 4.3.3)	873	253
Signal level field strength at	72 dBµA/m	72 dBµA/m	82 dBµA/m
the EUT	2 000 000 000 000 000 000 000 000 000 0	0.000 VEX.000 12 • 0.000 VEX.000 VE	
NOTE: F = OFR see claus	e 4.3.3.		•

#### **TEST RESULT**

Test Mode: Mode 1

Test Frequency(KHz)		Signal level @ EUT	Performance	Result
In-band signal	113.500	72dBuA/m	No function loss	Pass
OOB signal	112.764	72dBuA/m	No function loss	Pass
OOB signal	114.236	72dBuA/m	No function loss	Pass
Remote-band	106.140	82dBuA/m	No function loss	Pass
signal	120.860	82dBuA/m	No function loss	Pass

Test Mode: Mode 3:

Test Frequency(kHz)		Signal level @ EUT	Performance	Result
In-band signal	113.500	72dBuA/m	No function loss	Pass
OOP signal	112.768	72dBuA/m	No function loss	Pass
OOB signal	114.232	72dBuA/m	No function loss	Pass
Remote-band	106.180	82dBuA/m	No function loss	Pass
signal	120.820	82dBuA/m	No function loss	Pass




Page 29 of 31

#### **6. INTERPRETATION OF MEASUREMENT RESULTS**

All the measurement equipments and accessories have been carefully selected to meet the maximum measurement uncertainty specified below:


RF Frequency	± 1 x 10 <sup>-7</sup>
	1 1 7 10
RF Power, Conducted	± 0.75dB
Maximum Frequency Deviation: _ Within 300Hz and 6KHz of Audio Frequency _ Within 6KHz and 25KHz of Audio Frequency	± 5% ± 3dB
Adjacent channel power	± 3dB
Conducted Emission of Transmitter, Valid Up to 12.75GHz	± 4dB
Conducted Emissions of Receivers	± 3dB
Radiated Emission of Transmitter, Valid Up to 12.75GHz	± 6dB

P.S. Uncertainty figures are valid to confidence level of 95% calculated according to the methods described in the ETSI TR 100 028.





#### APPENDIX A: PHOTOGRAPHS OF TEST SETUP

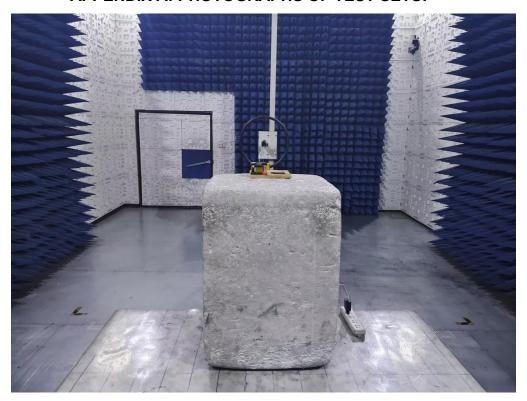





Page 31 of 31

#### APPENDIX B: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC11890240521AP01
----END OF REPORT---



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.



# **Health Test Report**

Report No.: AGC05443240615EH01

**PRODUCT DESIGNATION**: Bamboo weather station

**BRAND NAME** : N/A

MODEL NAME : M06665

**APPLICANT**: MID OCEAN BRANDS B.V.

**DATE OF ISSUE** : Jun. 25, 2024

**STANDARD(S)** : EN IEC 62311:2020 EN 50665:2017

**REPORT VERSION**: V1.0

Attestation of Global Confice (Shenzhen) Co., Ltd.



Page 2 of 13

# REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Jun. 25, 2024	Valid	Initial release



Page 3 of 13

# **TABLE OF CONTENTS**

TABLE OF CONTENTS	3
1. GENERAL INFORMATION	4
2. TECHNICAL INFORMATION	
3. RF EXPOSURE MEASUREMENT	
3.1 INTRODUCTION	
4. TEST EQUIPMENT LIST	
5. EUT OPERATION CONDITION	9
6. TEST RESULT	10
7. CONCLUSION	10
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	11



Page 4 of 13

# 1. GENERAL INFORMATION

Applicant	MID OCEAN BRANDS B.V.	
Address	Unit 201 2/F,. Laford Centre,838 Lai Chi Kok Road, Cheung Sha Wan, Kowloon, Hongkong	
Manufacturer	MID OCEAN BRANDS B.V.	
Address	Unit 201 2/F,. Laford Centre,838 Lai Chi Kok Road, Cheung Sha Wan, Kowloon, Hongkong	
Factory	MID OCEAN BRANDS B.V.	
Address	Unit 201 2/F,. Laford Centre,838 Lai Chi Kok Road, Cheung Sha Wan, Kowloon, Hongkong	
Product Designation	duct Designation Bamboo weather station	
Brand Name	N/A	
Test Model	MO6665	
Series Model(s)	N/A	
Difference Description	N/A	
Date of receipt of test item	Jun. 18, 2024	
Date of test	Jun. 18, 2024 to Jun. 25, 2024	
Test Result	Pass	

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jouk Gai	
	Jack Gui (Project Engineer)	Jun. 25, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Jun. 25, 2024
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Jun. 25, 2024



Page 5 of 13

# 2. TECHNICAL INFORMATION

Note: the following data is based on the information by the applicant.

Product Designation	Bamboo weather station
Brand Name	N/A
Test Model	MO6665
Hardware Version	V1.0
Software Version	V1.0
Frequency Band	110kHz-205kHz
Antenna Type	Coil Antenna
Wireless Charging Input Rating	DC 5V/2A, DC 9.0V/1.67A
Wireless Charging Output Power	5W/10W

Note: For more details, please refer to the user's manual of the EUT.



Page 6 of 13

### 3. RF EXPOSURE MEASUREMENT

#### 3.1 INTRODUCTION

This International Standard applies to electronic and electrical equipment for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.

This generic standard applies to electronic and electrical apparatus for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.

The frequency range covered is 0 Hz to 300 GHz.

The object of this generic standard is to provide assessment methods and criteria to evaluate such equipment against basic restrictions or reference levels on exposure of the general public related to electric, magnetic, electromagnetic fields and induced and contact current.

**NOTE**: This standard is intended to cover both intentional and non-intentional radiators. If the equipment complies with the requirements in another relevant standard, e.g. EN 62479 covering low power equipment, then the requirements of this standard (IEC 62311) are considered to be met and the application of this standard to that equipment is not necessary.



Page 7 of 13

#### 3.2 TEST LIMIT

According to EN IEC 62311:2020, Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz - 300 GHz).

#### Annex F Measurement of E and H field

A commonly used probe size is 100 cm<sup>2</sup>, also the contribution of the three axes X, Y and Z can be evaluated separately.

Reference levels for electric, magnetic and electromagnetic fields (0 Hz to 300 GHz, unperturbed rms values)

Frequency range	E-field strength (V/m)	H-field strength (A/m)	B-field (μT)	Equivalent plane wave power density S <sub>eq</sub> (W/m²)
0-1 Hz	_	3,2 × 10 <sup>4</sup>	4 × 10 <sup>4</sup>	_
1-8 Hz	10 000	$3,2 \times 10^4/f^2$	$4 \times 10^{4}/f^{2}$	2 <u>42</u> 7
8-25 Hz	10 000	4 000/f	5 000/f	_
0,025-0,8 kHz	250/f	4/f	5/f	_
0,8-3 kHz	250/f	5	6,25	_
3-150 kHz	87	5	6,25	3 <u>48</u> 3
0,15-1 MHz	87	0,73/f	0,92/f	( <del></del>
1-10 MHz	87/f <sup>1/2</sup>	0,73/f	0,92/f	_
10-400 MHz	28	0,073	0,092	2
400-2 000 MHz	1,375 f <sup>1/2</sup>	0,0037 f <sup>1/2</sup>	0,0046 f <sup>1/2</sup>	f/200
2-300 GHz	61	0,16	0,20	10




Page 8 of 13

#### 3.3 EVALUATION METHODS

#### Measurement of E and H field

A commonly used probe size is 100 cm<sup>2</sup>, also the contribution of the three axes X, Y and Z can be evaluated separately.

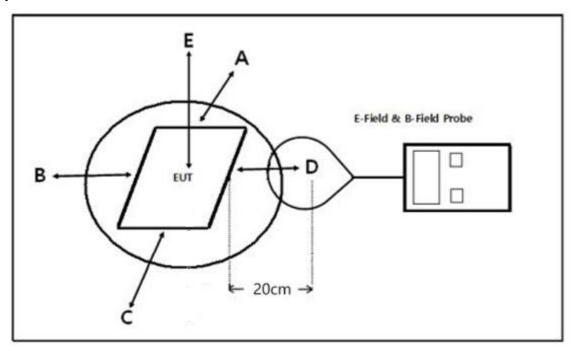

Note: Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT; Position E: Top of EUT

The measurement probe was placed at test distance (20cm) which is between the edge and center of probe Based on the above standard limit, any device with output power below 5A/m cannot produce an exposure exceeding this restriction under the most pessimistic exposure conditions.



Page 9 of 13

# 4. TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Broadband Field Meter	WAVECONTROL	SMP2	19SN1101	Feb. 24, 2023	Feb. 23, 2025
Probe FHP	WAVECONTROL	WP400	19WP100558	Feb. 24, 2023	Feb. 23, 2025

#### 5. EUT OPERATION CONDITION

NO.	TEST MODE DESCRIPTION
1	AC/DC Adapter Input 5V 2A + EUT + Wireless load(Full load)
2	AC/DC Adapter Input 5V 2A + EUT + Wireless load(half load)
3	AC/DC Adapter Input 5V 2A + EUT + Wireless load(null load)
4	AC/DC Adapter Input 9V 1.67A + EUT + Wireless load(Full load)
5	AC/DC Adapter Input 9V 1.67A + EUT + Wireless load(half load)
6	AC/DC Adapter Input 9V 1.67A + EUT + Wireless load(null load)
	·

#### Note:

1. All modes have been tested and only the worst mode test data recorded in the test report.



Page 10 of 13

#### 6. TEST RESULT

Frequency	Maximum Radiated H-Field at 20cm		Limit	Result
MHz	A/m		A/m	Pass/Fail
113.5kHz	position E	0.075	5	Pass
	position A	0.065		
	position B	0.054		
	position C	0.048		
	position D	0.042		

Since Radiated H-Field at worse case is 0.075A/m which cannot exceed the exempt condition 5A/m. It is deemed to full fit the requirement of RF exposure basic restriction specified in EC Council Recommendation (1999/519/EC).

#### 7. CONCLUSION


Remark: EUT meets the basic requirements in the standard.



Page 11 of 13

# **APPENDIX I: PHOTOGRAPHS OF TEST SETUP**

WPT Equipment\_ Position E

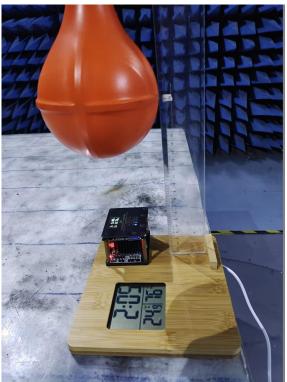


WPT Equipment\_ Position A





Page 12 of 13





WPT Equipment\_ Position C





Page 13 of 13

# WPT Equipment\_ Position D



----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.